




mod. Verona SAP
Verona SED - TCS SED


Instruction Booklet
Bedienungsanleitung
Livret D'Instructions
Libro De Instrucciones




Mod. VERONA 2GR SED

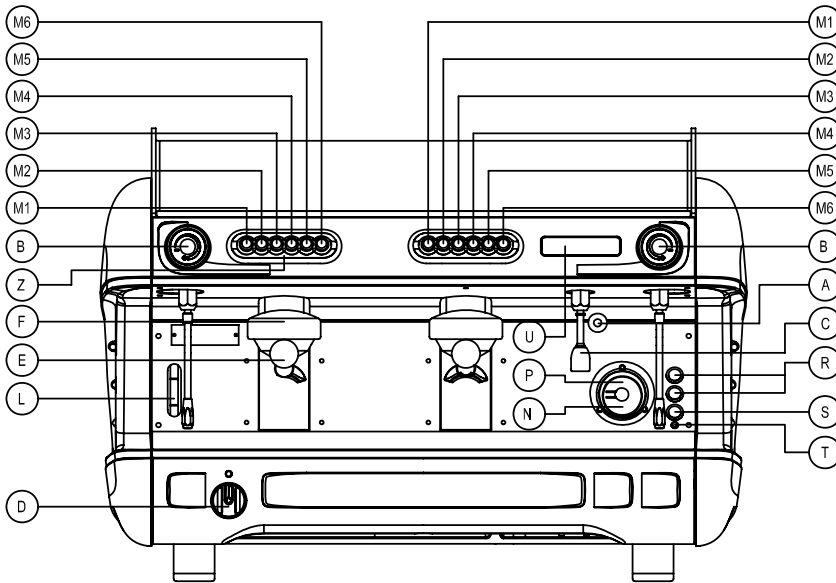

Mod. VERONA 2GR TCS SED

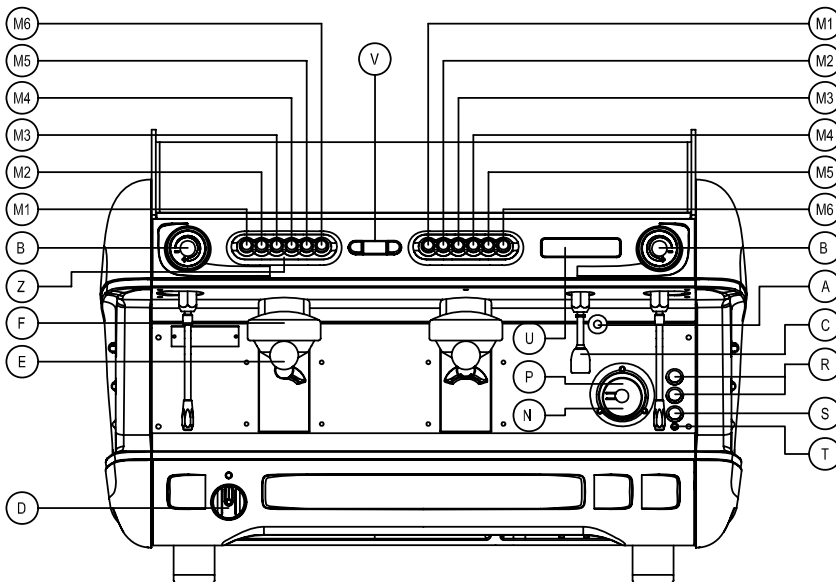


Mod. VERONA 2GR SAP

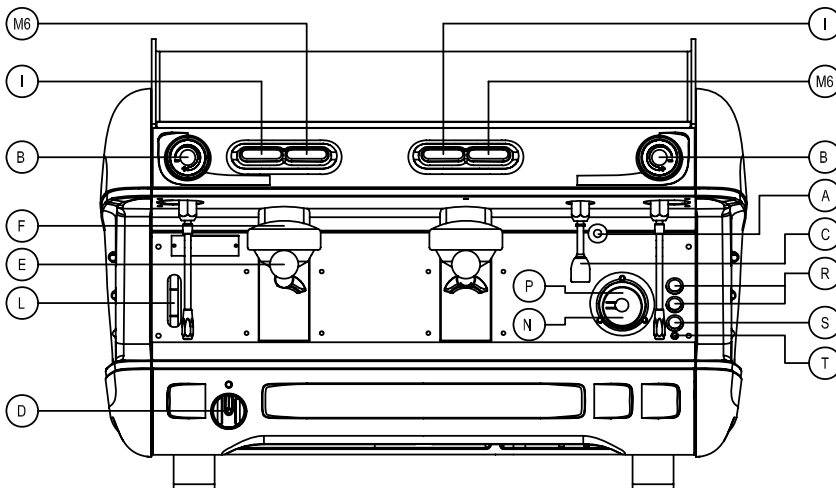

- A - Azionamento manuale entrata acqua
- B - Manopola rubinetto vapore
- C - Erogatore acqua
- D - Interruttore generale
- 0 - Spento
- 1 - Accensione pompa ed automatismi
- 2 - Accensione pompa, automatismi e riscaldamento elettrico
- E - Portafiltro
- F - Gruppo inserimento portafiltro
- I - Tasto erogazione - arresto
- L - Indicatore di livello caldaia
- M1 - Erogazione di una dose corta di caffè
- M2 - Erogazione di una dose lunga di caffè
- M3 - Erogazione di due dosi corte di caffè
- M4 - Erogazione di due dosi lunghe di caffè
- M5 - Erogazione continua e tasto programmazione
- M6 - Erogazione acqua calda
- N - Manometro pressione pompa
- P - Manometro pressione caldaia
- R - Interruttore per erogazione manuale continua
- S - Interruttore scaldatazze (Optional)
- T - Spia interruttore scaldatazze (Optional)
- U - Display
- V - Display pidbull
- Z - Barra luminosa indicante il termine dell'erogazione
- W - Erogazione vapore elettronico TSS
- X - Lancia vapore elettronico TSS
- Y - Regolatore di flusso per lancia vapore elettronico TSS

Mod. VERONA 2GR SED TSS / TCS SED TSS

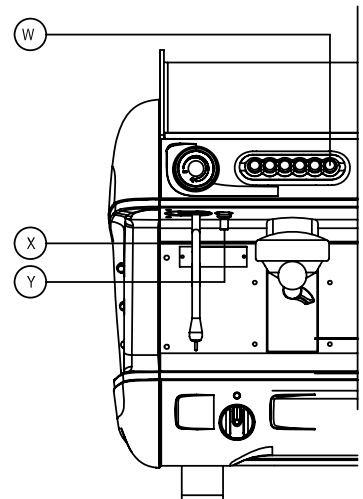

English

- A – Water inlet manual control
- B – Steam tap knob
- C – Water tap knob
- D – On/off switch
- 0 – Off
- 1 – Pump and automatic devices on
- 2 – Pump, automatic devices and heating element on
- E – Filter holder
- F – Filter holder group head
- I – Dispense – stop button
- L – Boiler level indicator
- M1 – One strong coffee
- M2 – One weak coffee
- M3 – Two strong coffees
- M4 – Two weak coffees
- M5 – Continual dispensing and programming key
- M6 – Hot water
- N – Pump pressure gauge
- P – Boiler pressure gauge
- R – Switch for continuous manual distribution
- S – Cup warmer switch (Optional)
- T – Warning light for cup warmer switch (Optional)
- U – Display
- V – Pidbull display
- Z – Luminous bar indicating end of distribution
- W – Electronic steam dispenser TSS
- X – Electronic steam wand TSS
- Y – Flow regulator for electronic steam wand TSS

Deutsch


- A – Schalter für manuellen Betrieb - Wasser-Zufluss
- B – Drehknopf Dampfahh
- C – Wasserabgabe
- D – Hauptschalter
- 0 – Ausgeschaltet
- 1 – Einschaltung Pumpe Und Automatismen
- 2 – Einschaltung Pumpe, Automatismen und elektrische Heizung
- E – Filterträger
- F – Filterträger-Einsatzgruppe
- I – Abgabe- / Stoptaste
- L – Niveau-Anzeige Heisswasser-Aufbereitung
- M1 – Abgabe einer kurzen Dosis Kaffee
- M2 – Abgabe einer langen Dosis Kaffee
- M3 – Abgabe von zwei kurzen Dosen Kaffee
- M4 – Abgabe von zwei langen Dosen Kaffee
- M5 – Dauerabgabe und Programmieraste
- M6 – Abgabe von heißem Wasser
- N – Manometer Pumpendruck
- P – Manometer Kesseldruck
- R – Schalter zur kontinuierlichen manuellen Abgabe
- S – Schalter Tassenwärmer (Optional)
- T – Kontrollanzeige Schalter Tassenwärmer (Optional)
- U – Display
- V – Display Pidbull
- Z – Leuchteiste, die das Ende der Abgabe anzeigt
- W – Elektronische Dampf Abgabe TSS
- X – Elektronisches Dampfrohr TSS
- Y – Flussregler für Elektronisches Dampfrohr TSS

Francais


- A – Remplissage manuel
- B – Robinet vapeur
- C – Robinet eau
- D – Interrupteur général
- 0 – Eteint
- 1 – Allumage pompe et carte
- 2 – Allumage pompe, carte et resistance
- E – Porte-filtre
- F – Groupe
- I – Clavier
- L – Indicateur de niveau d'eau
- M1 – Selection 1 café serré
- M2 – Selection 1 café standard
- M3 – Selection 2 cafés serrés
- M4 – Selection 2 cafés standard
- M5 – Distribution continue et touche programmation
- M6 – Distribution eau chaude
- N – Manomètre pression pompe
- P – Manomètre pression chaudière
- R – Interrupteur pour distribution manuelle du café
- S – Interrupteur chauffe-tasses (Option)
- T – Voyant chauffe-tasses (Option)
- U – Display général
- V – Display de réglage
- Z – Voyant luminex fin de distribution
- W – Touche vapeur électronique TSS
- X – Tube vapeur électronique TSS
- Y – Régulateur de pression pour tube vapeur électronique TSS

Espagnol





- A – Accionamiento manual para la entrada de agua
- B – Llave del grifo del vapor
- C – Suministrador de agua
- D – Interruptor general
- 0 – Desconectado
- 1 – Conexión de bomba y automatismos
- 2 – Conexión de bomba, automatismos y sistema eléctrico de calentamiento
- E – Portafiltro
- F – Grupo de inserción del portafiltro
- I – Tecla de suministro - paro
- L – Indicador de nivel de la caldera
- M1 – Suministro de una dosis corta de café
- M2 – Suministro de una dosis larga de café
- M3 – Suministro de dos dosis cortas de café
- M4 – Suministro de dos dosis largas de café
- M5 – Suministro continuo y tecla de programación
- M6 – Suministro de agua caliente
- N – Manómetro de presión de la bomba
- P – Manómetro de presión de la caldera
- R – Interruptor para suministro manual continuo
- S – Interruptor calentatazas (Opcional)
- T – Piloto interruptor calentatazas (Opcional)
- U – Display
- V – Display pidbull
- Z – Barra luminosa indicadora del final de la erogación.
- W – Salida de vapor electronica TSS
- X – Lanceta electronica de vapor TSS
- Y – Regulacion electronica de flujo de vapor en la lanceta TSS







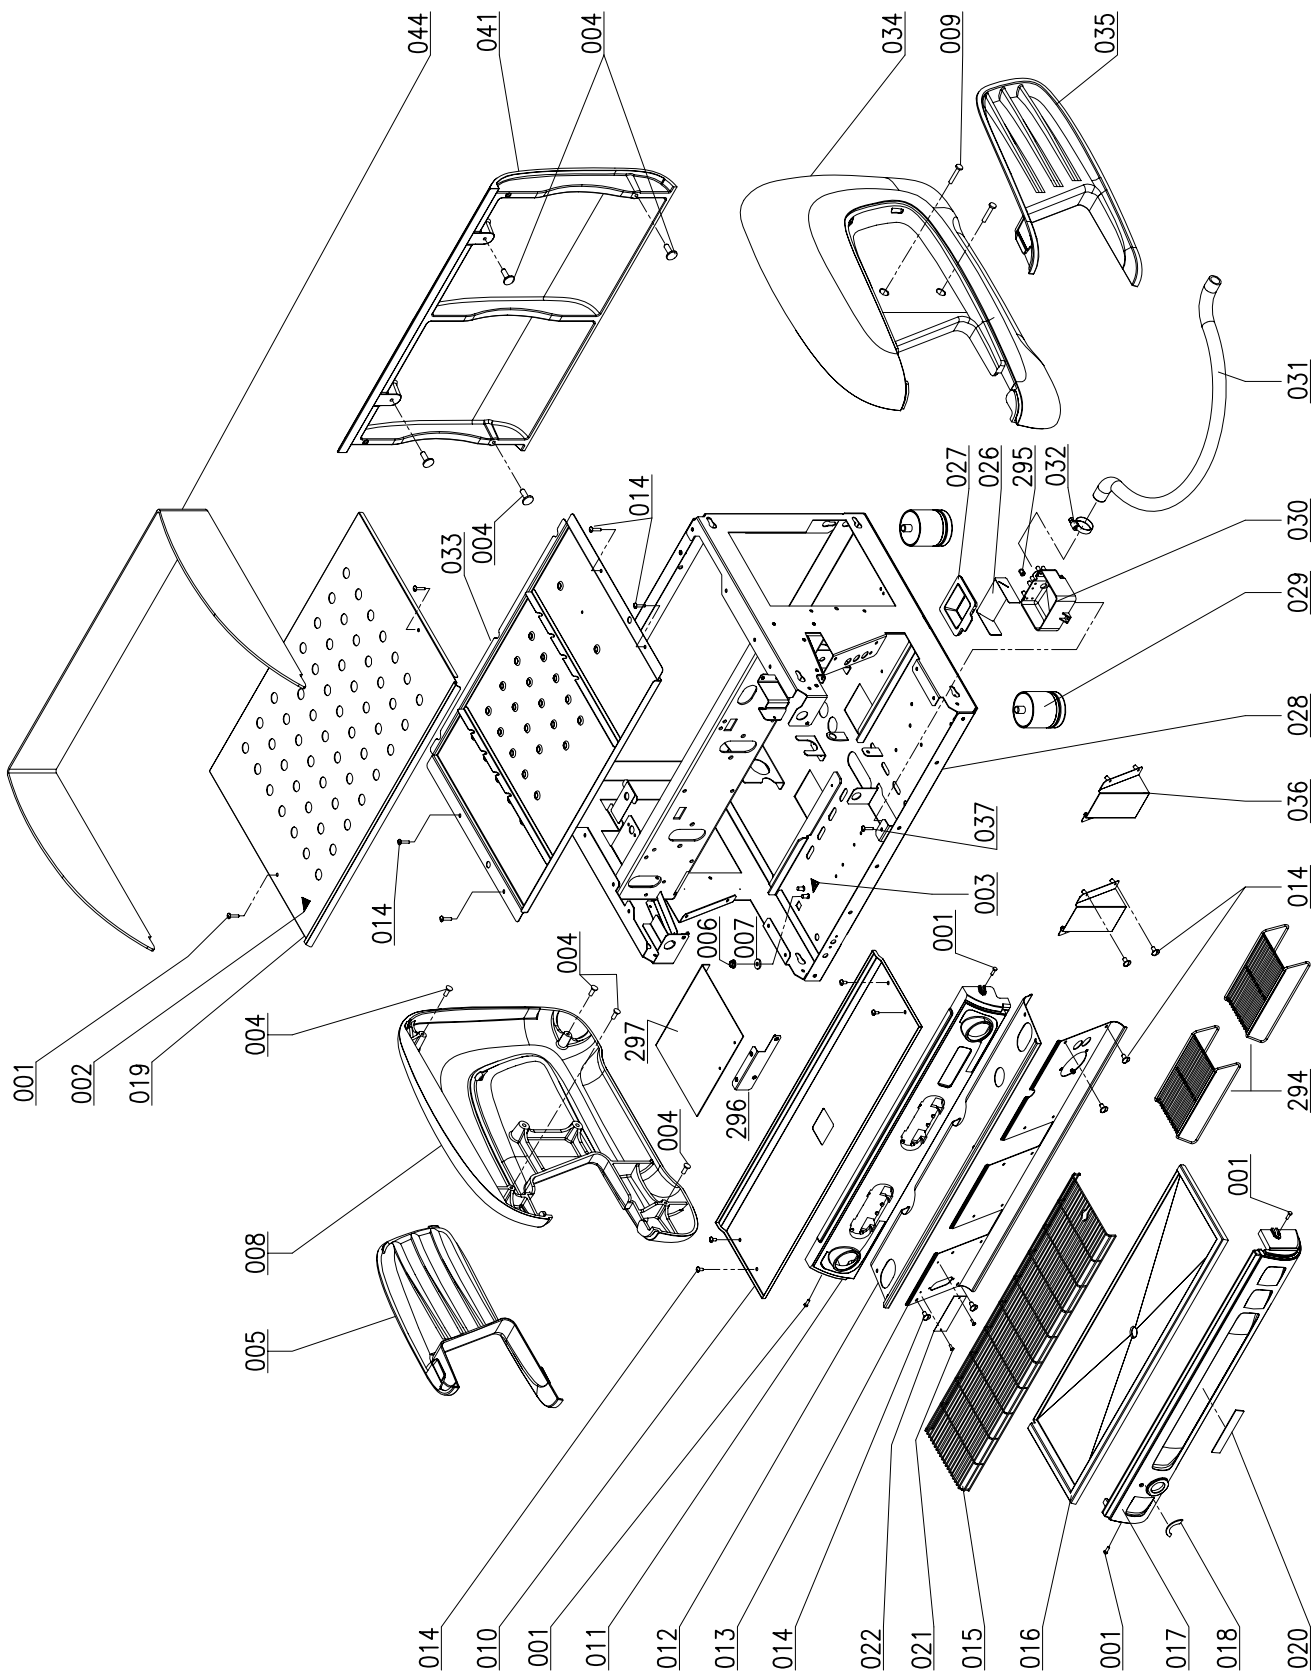


Tavola/Tablе 1 Mod. VERONA - Agg./Update 11/08

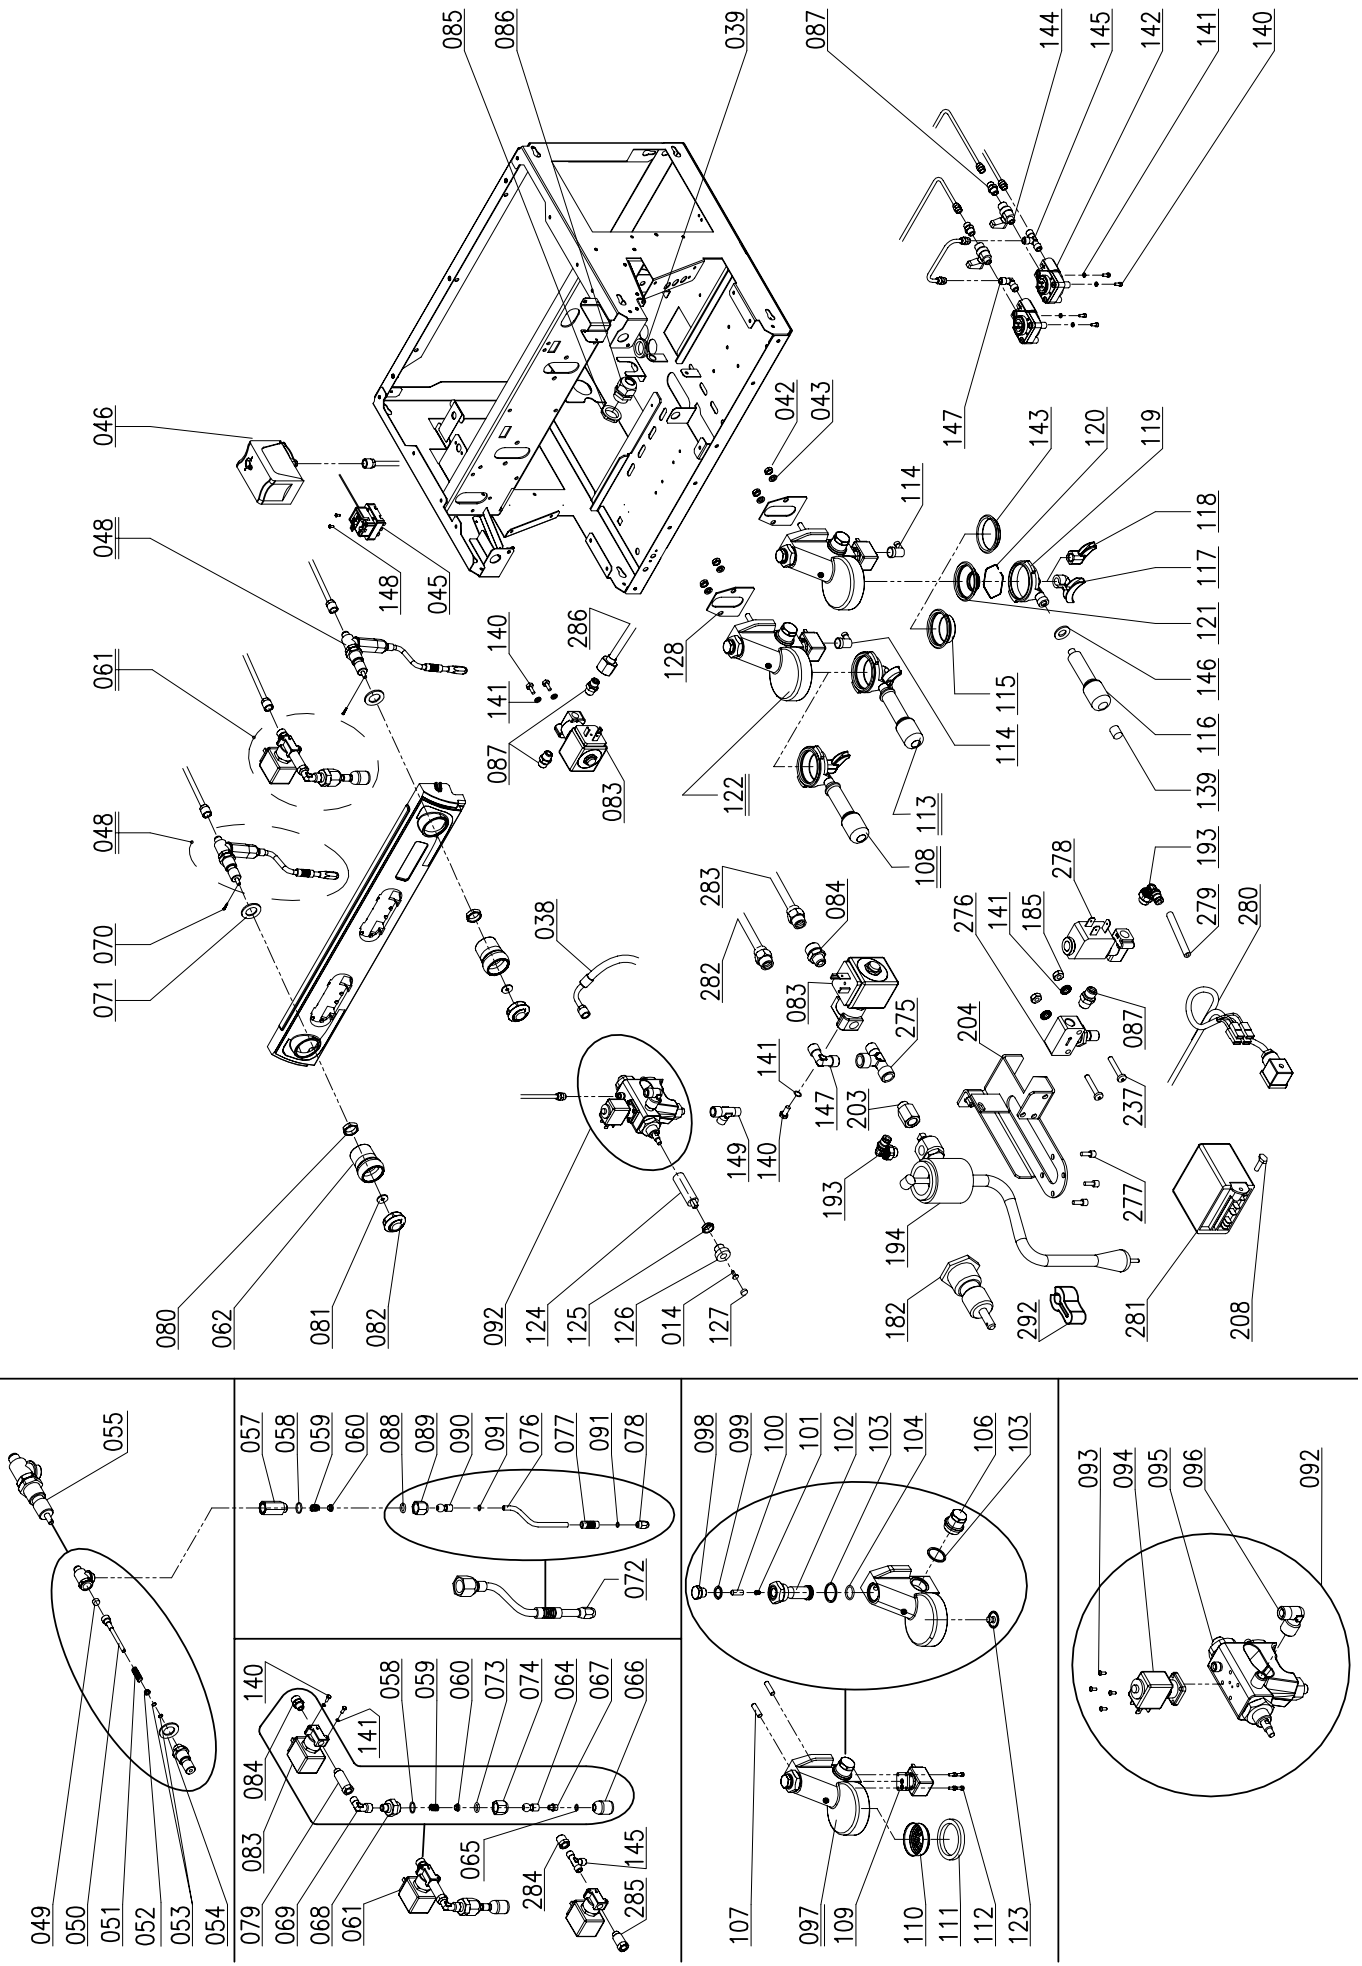

Tavola/Tablе 2 Mod. VERONA - Agg./Update 08/08

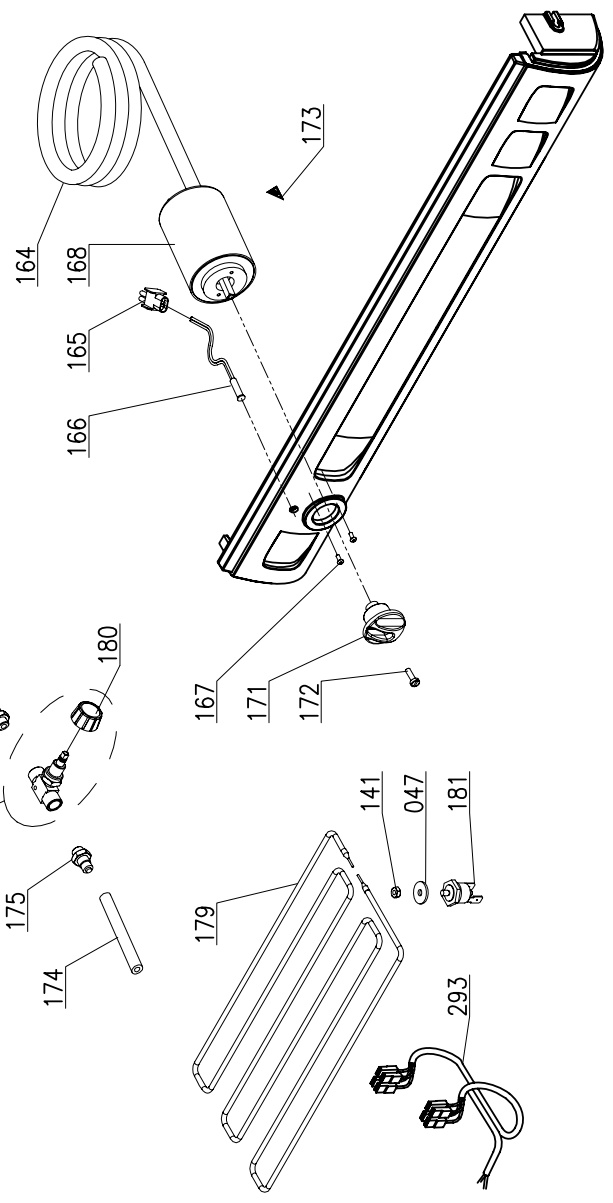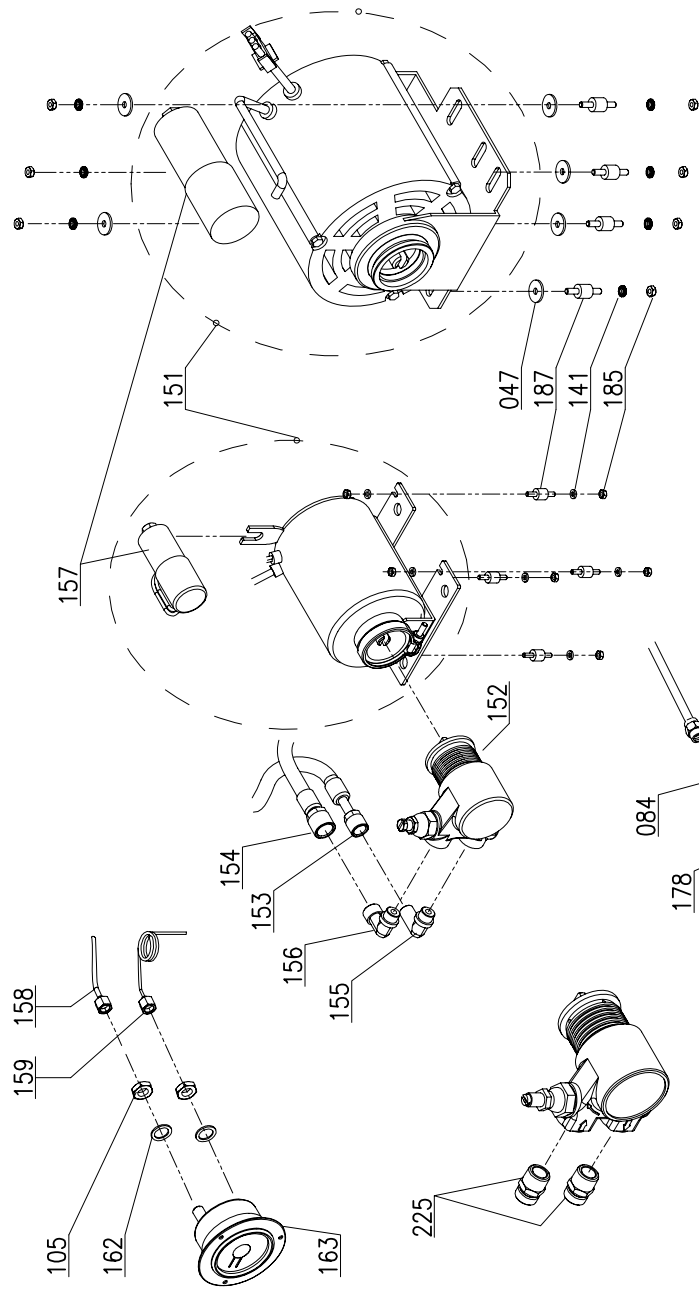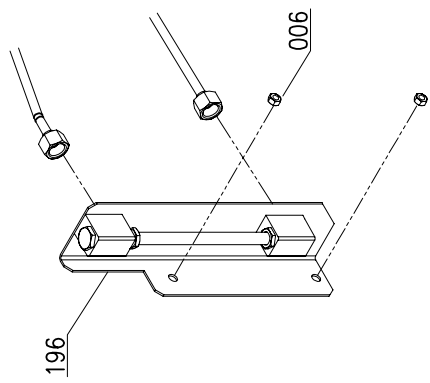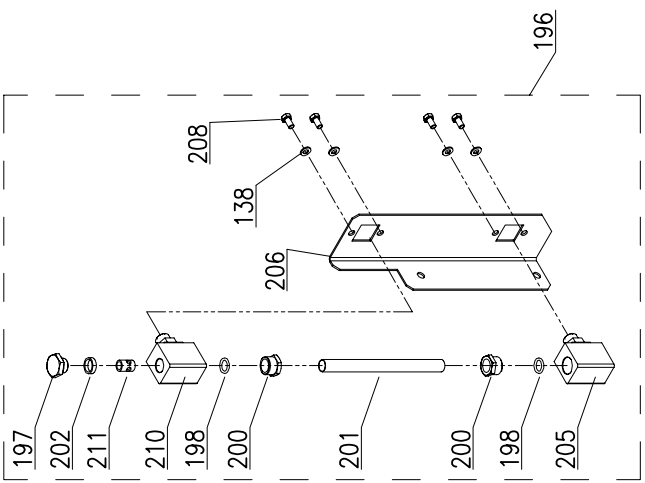

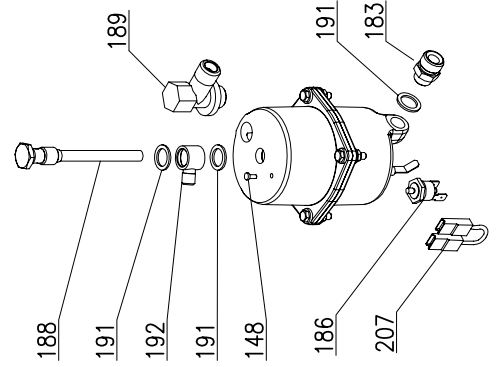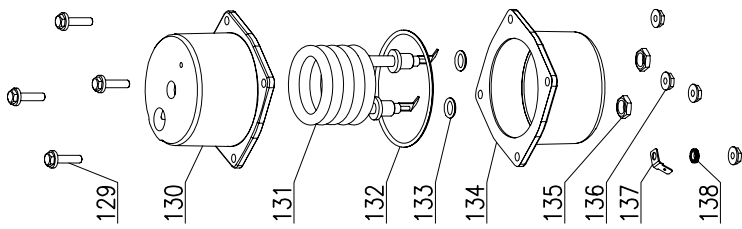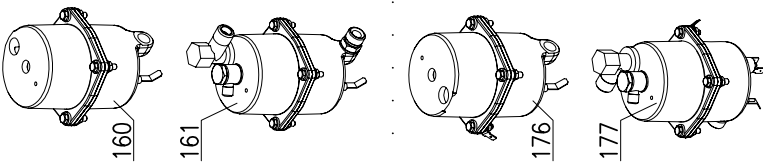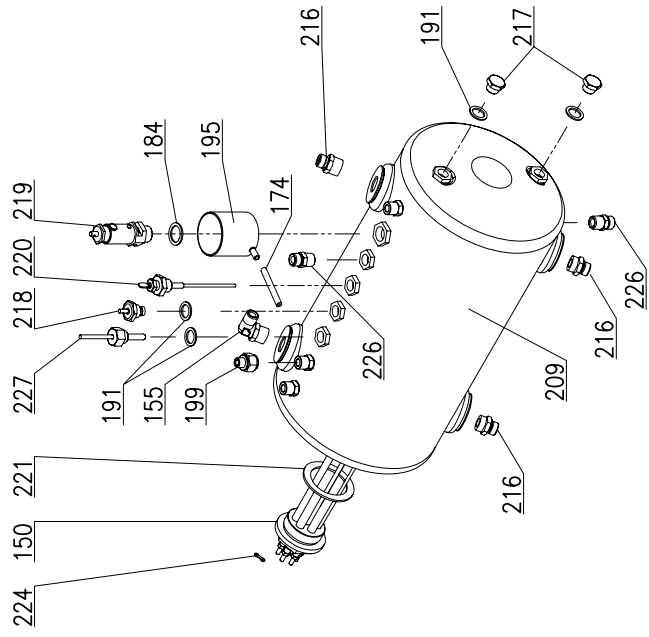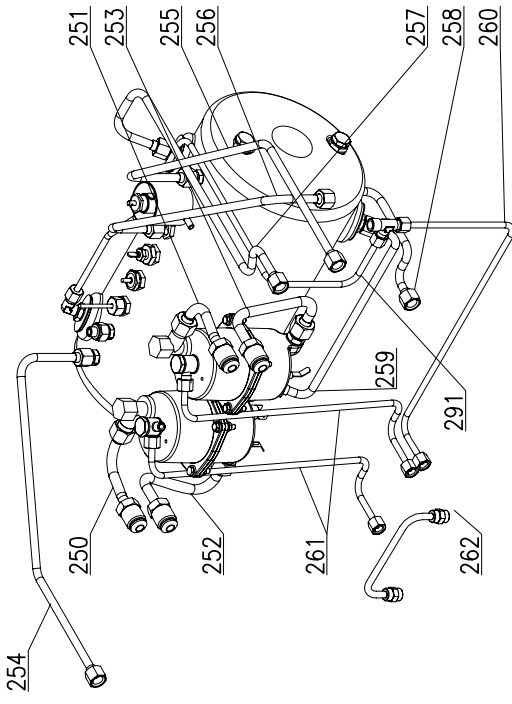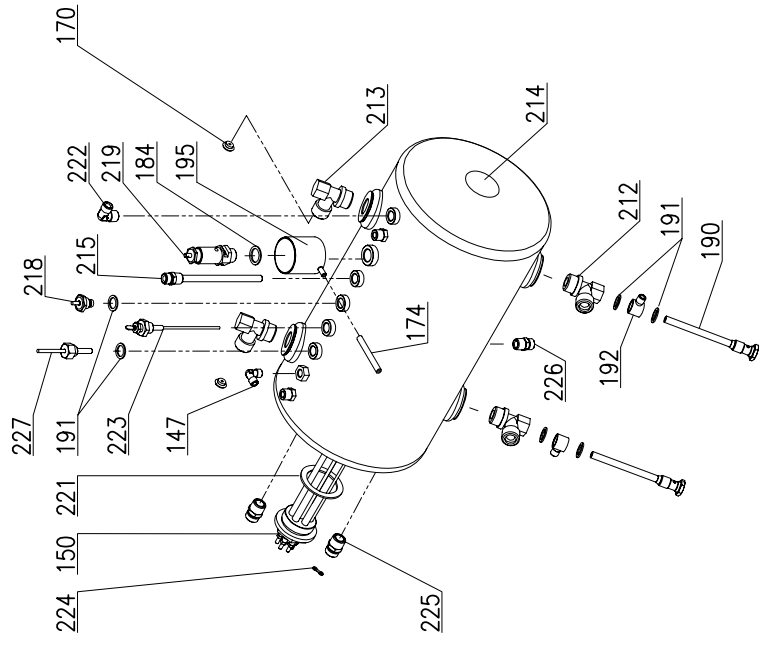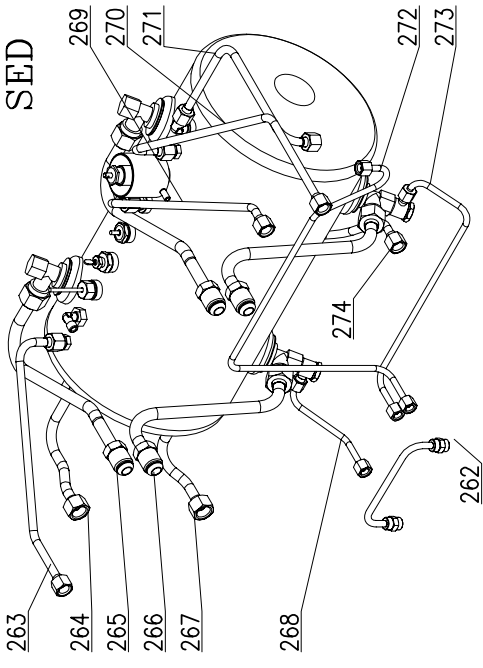

261d	10003040	TUBO ALIMENT.3°GR VR TCS TALL 3GR SED
262a	10002498	TUBO PONTE 1-2° VOL.PI 2-3GR SED
262b	10002209	TUBO PONTE 2-3° VOL.PI 3GR SED
263a	10002592	TUBO VAPORE SX VR 2GR
263b	10002692	TUBO VAPORE SX VR 3GR
264a	10002584	TUBO VETROLIVELLO SUP.VR 2GR
264b	10002684	TUBO VETROLIVELLO SUP.VR 3GR
265	10002582	TUBO SCAMB.SUP.VR 2-3GR
266	10002580	TUBO SCAMB.INF.VR 2-3GR
267a	10002586	TUBO VETROLIVELLO INF.VR 2GR
267b	10002686	TUBO VETROLIVELLO INF.VR 3GR
268a	10002598	TUBO ALIMENT.1°GR VR 2-3GR SED
268b	10002754	TUBO ALIMENT.1°GR VR TALL 2-3GR SED
269a	10002596	TUBO USCITA ACQUA VR 2GR
269b	10002696	TUBO USCITA ACQUA VR 3GR
270a	10002594	TUBO VAPORE DX VR 2GR
270b	10002694	TUBO VAPORE DX VR 3GR
271a	10002588	TUBO CARICO CALDAIA VR 2GR
271b	10002688	TUBO CARICO CALDAIA VR 3GR
272a	10002602	TUBO ALIMEN.VOLUM.VR 2GR
272b	10002750	TUBO ALIMEN.VOLUM.VR TALL 2GR
272c	10002702	TUBO ALIMEN.VOLUM.VR 3GR
272d	10002758	TUBO ALIMEN.VOLUM.VR TALL 3GR
273a	10002600	TUBO ALIMENT.2°GR VR 2GR
273b	10002756	TUBO ALIMENT.2°GR VR TALL 2-3GR
273c	10002700	TUBO ALIMENT.2°GR VR 3GR
273d	10002704	TUBO ALIMENT.3°GR VR 3GR
273e	10002760	TUBO ALIMENT.3°GR VR TALL 3GR
274a	10002590	TUBO SCARICO CALDAIA VR 2GR
274b	10002752	TUBO SCARICO CALDAIA VR TALL 2GR
274c	10002690	TUBO SCARICO CALDAIA VR 3GR
274d	10002762	TUBO SCARICO CALDAIA VR TALL 3GR
275	10853215	RACC. T 1/8" M/F/F
276	10852000	RIDUTTORE DI FLUSSO
277	10805060	VITE TCEI M4X6 A2
278	10303010A	ELETTROVALVOLA 1/8 2VIE 230V
279	10909010	TUBO TEFLON D.4X2,5
280	10102392	CABLAGGIO AGG. LANCIA ELE. VR-VR TCS 2-3GR
281	10112186	CENTRALINA ESPANSIONE RELE'
282	10002540	TUBO COLLEG. LANCIA TSS VR2-3GR C/EV ACQUA
283a	10002542	TUBO VAPORE SX VR TCS 2-3 LANCIA TSS
283b	10002608	TUBO VAPORE SX VR 2 LANCIA TSS
283c	10002710	TUBO VAPORE SX VR 3 LANCIA TSS
284	10852520	RACCORDO RIDUZ. 1/4M- 1/8F
285	10855555	PROLUNGA L.16 1/8M 1/8F
286a	10002538	TUBO COLLEG. EV. LAVAGGIO VR2 C/EV ACQUA
286b	10002708	TUBO COLLEG. EV. LAVAGGIO VR3 C/EV ACQUA
287	10112218	COPERCHIO RELE' STATICO
288	10805114	VITE TC+ SW M5X12 ZN
289	10112216A	RELE' STATICO
290	10112198	CAVO ALIMENTAZ. RELE'
291a	10002536	TUBO ALIM. SCAMB. VR TCS 2GR FORO D.1
291b	10002706	TUBO ALIM. SCAMB. VR TCS 3GR FORO D.1
292	10753056	GOMMINO ANTISCOT. PER LANCIA TSS
293a	10102086A	CABLAGGIO SCALDATAZZE VR 2-3GR
293b	10102414	CABLAGGIO SCALDATAZZE VR TALL 2-3GR
294	10012432	GRIGLIA ESPRESSO VR TALL
295	10052064	TAPPO VASCHETTA DI SCARICO
296	10012346	STAFFA SUPP. PROTEZIONE COMMUTATORE VR 2-3GR
297a	10352142	PROTEZIONE COMMUTATORE VR 2GR
297b	10352146	PROTEZIONE COMMUTATORE VR 3GR

**LEGEND EXPLODED DIAGRAM VERONA 2/3GR SED-SAP
2/3GR TCS - 2GR MUG - UPDATE 08-08**

POS.	COD.	DESCRIPTION
1	10805022	SCREWS TBL+ M4X20 A2 POLIERS
2	10955013	TRIANG. HOT SURFACE SYM. LABEL
3	10955025A	ADHESIVE EARTH SYM. LABEL
4	10801028	SCREW TSPEI M6X10 A2
5a	10091220	AIR INTAKE, SIDE PANEL LH
5b	10091260	AIR INTAKE TALL SIDE PANEL LH
6	10809012	NUT, KNURLED FLANGED, 6MA ZN
7	10803536	TOOTHED WASHER D6.2 ZN
8a	10091120	SIDE PANEL, LH, VERONA, MET. BLACK PAINT
8b	10091320A	SIDE PANEL, LH, VERONA TALL, MET. BLACK PAINT
8c	10091180	SIDE PANEL, LH, VERONA, MET. BLUE PAINT
8d	10091380A	SIDE PANEL, LH, VERONA TALL, BLUE PAINT
8e	10091185	SIDE PANEL, LH, VERONA, WHITE PAINT
8f	10091385A	SIDE PANEL, LH, VERONA TALL, WHITE PAINT
9	10805029	SCREW TBL- M4X35 A2 POLIERS
10a	10012360	CONTROL UNIT PROT. PLATE VERONA 2GR
10b	10012410	CONTROL UNIT PROT. PLATE VERONA 3GR
11a	10091400	TOP FRONT PANEL VR TCS 2GR BLACK PAINT
11b	10091430	TOP FRONT PANEL VR TCS 3GR BLACK PAINT
11c	10091450	TOP FRONT PANEL VR SED 2GR BLACK PAINT
11d	10091480	TOP FRONT PANEL VR SED 3GR BLACK PAINT
11e	10091460	TOP FRONT PANEL VR SAP 2GR BLACK PAINT
11f	10091470	TOP FRONT PANEL VR SAP 3GR BLACK PAINT
11g	10091600	TOP FRONT PANEL VR TCS 2GR BLUE PAINT
11h	10091630	TOP FRONT PANEL VR TCS 3GR BLUE PAINT
11i	10091650	TOP FRONT PANEL VR SED 2GR BLUE PAINT
11l	10091680	TOP FRONT PANEL VR SED 3GR BLUE PAINT
11m	10091660	TOP FRONT PANEL VR SAP 2GR BLUE PAINT
11n	10091670	TOP FRONT PANEL VR SAP 3GR BLUE PAINT
11o	10091900	TOP FRONT PANEL VR TCS 2GR WHITE PAINT
11p	10091930	TOP FRONT PANEL VR TCS 3GR WHITE PAINT
11q	10091950	TOP FRONT PANEL VR SED 2GR WHITE PAINT
11r	10091980	TOP FRONT PANEL VR SED 3GR WHITE PAINT
11s	10091960	TOP FRONT PANEL VR SAP 2GR WHITE PAINT
11t	10091970	TOP FRONT PANEL VR SAP 3GR WHITE PAINT
12a	10012364A	PROT. GROUPS VERONA 2GR
12b	10012452	PROT. GROUPS VERONA TALL 2GR
12c	10012414A	PROT. GROUPS VERONA 3GR
12d	10012374A	PROT. ELECTR. LANCE ASSYS. VERONA 2GR
12e	10012454	PROT. ELECTR. LANCE ASSYS. VERONA TALL 2GR
12f	10012422A	PROT. ELECTR. LANCE ASSYS. VERONA 3GR
13a	10012362	FRONT PROT. VERONA 2GR
13b	10012446	FRONT PROT. VERONA TALL 2GR
13c	10012412	FRONT PROT. VERONA 3GR
13d	10012476	FRONT PROT. VERONA TALL 3GR
13e	10012384	FRONT PROT. VERONA 2GR CUP WARMER
13f	10012448	FRONT PROT. VERONA TALL 2GR CUP WARMER
13g	10012424	FRONT PROT. VERONA 3GR CUP WARMER
13h	10012478	FRONT PROT. VERONA TALL 3GR CUP WARMER
13i	10012386	FRONT PROT. VERONA TCS 2GR
13l	10012388	FRONT PROT. VERONA TCS 2GR CUP WARMER
13m	10012450	FRONT PROT. VERONA TCS TALL 2GR CUP WARMER
13n	10012428	FRONT PROT. VERONA TCS 3GR CUP WARMER
13o	10012480	FRONT PROT. VERONA TCS TALL 3GR CUP WARMER
14	10805027	SCREW TBL- M4x10 A2
15a	10022726A	DRAIN GRILLE VERONA 2GR FILINOX
15b	10012430	DRAIN GRILLE VERONA 3GR FILINOX
16a	10012398	DRIP TRAY VERONA 2GR
16b	10012408	DRIP TRAY VERONA 3GR
17a	10091410	BOTT. FRONT PANEL VR 2GR MET. BLACK PAINT
17b	10091440	BOTT. FRONT PANEL VR 3GR MET. BLACK PAINT
17c	10091610	BOTT. FRONT PANEL VR 2GR MET. BLUE PAINT
17d	10091640	BOTT. FRONT PANEL VR 3GR MET. BLUE PAINT

ENGLISH

17e	10091910	BOTT. FRONT PANEL VR 2GR WHITE PAINT
17f	10091940	BOTT. FRONT PANEL VR 3GR WHITE PAINT
18	10955070A	LABEL 0 1 2 CHROMED
19a	10012354A	CUP GRILLE VERONA 2GR
19b	10012404A	CUP GRILLE VERONA 3GR
20	10955060	LABEL SAN REMO CHROMED
21	10805950	RIVET D3x6
22a	10952051A	RATING PLATE AL. SAN REMO 230V
22b	10952052A	RATING PLATE AL. SAN REMO 400V
22c	10952053	RATING PLATE AL. SAN REMO 120V
23	10805126	SCREW TC+ M3X6 A2
24	10352062	LEV. VIEW. WIN. COVER
25	10806672	NUT 3MA A2
26	10012144	FLOW REGULATOR FOR DRIP TRAY
27	10022476	COVER FOR DRIP TRAY
28a	10012352D	FRAME VERONA 2GR BLACK
28b	10012442	FRAME VERONA TALL 2GR BLACK
28c	10012402A	FRAME VERONA 3GR BLACK
28d	10012472	FRAME VERONA TALL 3GR BLACK
29	10352065	TELESCOPIC FOOT INOX
30	10022474	DRIP TRAY
31	10852460	DRAIN HOSE
32	10806099	HOSE CLIP
33a	10012369	TOP TANK VERONA 2GR FOR D8 RESISTOR
33b	10012426	TOP TANK VERONA 3GR FOR D8 RESISTOR
33c	10012369A	TOP TANK VERONA 2GR FOR D6 RESISTOR
33d	10012426A	TOP TANK VERONA 3GR FOR D6 RESISTOR
34a	10091100	SIDE PANEL, RH, VERONA, MET. BLACK PAINT
34b	10091300A	SIDE PANEL, RH, VERONA TALL, MET. BLACK PAINT
34c	10091170	SIDE PANEL, RH, VERONA, MET. BLUE PAINT
34d	10091370A	SIDE PANEL, RH, VERONA TALL, MET. BLUE PAINT
34e	10091175	SIDE PANEL, RH, VERONA, WHITE PAINT
34f	10091375A	SIDE PANEL, RH, VERONA TALL, WHITE PAINT
35a	10091200	AIR INTAKE, SIDE PANEL RH
35b	10091240	AIR INTAKE TALL SIDE PANEL RH
36a	10012356	SOLENOID VALVE COVER VERONA 2-3GR
36b	10012444	SOLENOID VALVE COVER VERONA TALL 2-3GR
37	10805084	SCREW TC+ M4X10 ZN
38	10852470	DRIVE HOSE 1/4 TD8-TD8 L.450
39	10105030	RUBBER GROMMET
40	10955080A	LABEL VERONA LOGO CHROMED
41a	10091500	BACK PANEL VR 2GR MET. BLACK PAINT
41b	10012458	BACK PANEL VR TALL 2GR MET. BLACK PAINT
41c	10091502	BACK PANEL VR 3GR MET. BLACK PAINT
41d	10012484	BACK PANEL VR TALL 3GR MET. BLACK PAINT
41e	10091520	BACK PANEL VR 2GR MET. BLUE PAINT
41f	10012460	BACK PANEL VR TALL 2GR MET. BLUE PAINT
41g	10091522	BACK PANEL VR 3GR MET. BLUE PAINT
41h	10012486	BACK PANEL VR TALL 3GR MET. BLUE PAINT
41i	10091590	BACK PANEL VR 2GR WHITE PAINT
41l	10012462	BACK PANEL VR TALL 2GR WHITE PAINT
41m	10091592	BACK PANEL VR 3GR WHITE PAINT
41n	10012488	BACK PANEL VR TALL 3GR WHITE PAINT
42	10802500	NUT M8 MEDIUM ZN
43	10803538	TOOTHED WASHER D8.2 ZN
44a	10352100	TOP CUP RETAINER 2GR BLACK
44b	10352102	TOP CUP RETAINER 3GR BLACK
45	10111015	THERMOSTAT 169° WITH MAN. RESET
46	10602010	PRESSURE SWITCH
47	10805562	WASHER D4x16x1.5 FLAT ZN
48	10402238	COMPLETE STEAM TAP VERONA
49	10505558	SILICON TAP GASKET
50	10402061	CENTRAL TAP SHAFT
51	10402014	TAP SHAFT SPRING
52	10402015	TAP SHAFT BUSH
53	10505121	OR 5.7X1.9 SHAFT

54	10505561	BUSH COPPER
55	10402120A	COMPL. TAP BODY
57	10852926	HEX. STEAM THERMOBLOCK EXTENSION
58	10402056	OR 2062 VITON BLACK
59	10402043	TAP JOINT SPRING
60	10402054	TAP JOINT CAP
61a	10402002	COMPL. WATER TAP VR 230V
61b	10402004	COMPL. WATER TAP VR 120V
62	10091140	STEAM KNOB VERONA BLACK
64	10858589	SWIVEL JOINT X STEAM THERMOBLOCK CHROMED
65	10502041	OR 2025 EPDM
66	10402140	BOILER OUTLET
67	10852069B	DIF. UNION/SWIVEL JOINT CHROMED A/C MI
68	10859029	REDUCER UNION 1/8" M 3/8" M CHROMED A/C MI
69	10852210	2020 1/8 UNION L F.M.
70	10806370B	TAP SPLIT PIN
71	10803547	FLAT WASHER D20 ZN
72	10402286C	COMPLETE LANCE MLX INOX
73	10402063	OR 115 EPDM
74	10402022B	TAP JOINT NUT
75	10858589	SWIVEL JOINT X STEAM THERMOBLOCK CHROMED
76	10402293B	STEAM THERMOBLOCK TUBE
77	10753052	ANTI-BURN JOINT
78	10402279	STEAM LANCE NOZZLE
79	10852741	2525 1/8" M 1/8" F L.36mm UNION
80	10402028	HALF NUT 1/2" CHR. RAISED
81	10402040	TAP WASHER BRASS
82	10091142	STEAM KNOB CAP VERONA +/- BLACK
83a	10303060	2-WAY 1/8" SOLENOID VALVE 120V
83b	10303086	2-WAY 1/8" SOLENOID VALVE 230V
84	10852050A	1050 8-1/8" M UNION
85	10102250	ANTI-TEAR GROMMET AL. PG 21
86	10102249	HEXAGONAL LOCK NUT PG.21
87	10852080A	STRAIGHT UNION 1050 6-1/8" M
88	10402082	LANCE JOINT OR MLX EPDM
89	10402282	STEAM LANCE NUT MLX
90	10402288	STEAM LANCE BALL JOINT MLX INOX
91	10402081	LANCE TUBE OR MLX
92a	10056082	FILL BLOCK ASSY. 120V VERONA
92b	10056084	FILL BLOCK ASSY. 230V VERONA
93	10805251	SCREW TC+ M3X8 ZN
94a	10303080	2-WAY SOLENOID VALVE BAS 25X25 230V
94b	10303094	2-WAY SOLENOID VALVE BAS 25X25 120V
95	10056060	FILL ASSY. BODY VERONA
96	10852075	ELBOW UNION 1093 8-1/4" F
97	10052130	DELIVERY ASSY. SAN REMO E61
98	10052137A	CLOSURE CAP GIGLEUR GR. E61
99	10502105A	TOP MUSHROOM GASKET SUP.GR.E61
100	10052136	FILTER ASSY. E-61/RING
101	10052135	GIGLEUR HOLE GR. D.O.8
102	10052133A	TOP MUSHROOM GR. E-61
103	10502090A	SIDE MUSHROOM GASKET GR. E61
104	10502100	MUSHROOM GASKET GR. IN.E61
105	10853085	HEXAGONAL NUT 1/8" HEX.12X3MM
106	10052132A	SIDE MUSHROOM GR. E-61
107	10052134	SCREW STUDS GR. E61
108	10402310	FILTER HOLDER ASSY. 1 CUP VR
109a	10302066	SOLENOID VALVE 3-WAY BAS.32X32 230V
109b	10305555	SOLENOID VALVE 3-WAY BAS.32X32 120V
110	10052120	MESH BOILER OUTLET GR. E61
111	10502110	UNDERCUP GASKET H8.2mm GR. E61
112	10805071	SCREW TCEI M4X10 A2
113	10402312	FILTER HOLDER ASSY. 2 CUP VR
114	10255028A	ELBOW UNION ROT. F1/8 WITH HOSE CONNECTOR .
115	10052110	FILTER 2 CUPS
116	10091150	FILTER HOLDER HANDLE MOD.VR-RM BLACK

ENGLISH


117	10052085	SPOUT 2-WAY FULLY OPEN
118	10052075	SPOUT 1-WAY FULLY OPEN
119	10052034	SLANT. FILTER HOLDER BODY W/RING
120	10052050	FILTER RETAINER SPRING
121a	10052100	FILTER 1 CUP
121b	10052101	FILTER 1 CUP 6GR
122a	10052212	GR.E61 ASSY. 120V WITHOUT UNION
122b	10052214	GR.E61 ASSY. 230V WITHOUT UNION
123	10052141	DIFFUSER GR. E61
124	10852084	EXTENSION L. 52 VR CHROMED
125	10805585	NUT NI HEX.22
126	10405500	MANUAL FILL WHEEL D.30
127	10405520	MANUAL FILL WHEEL CAP MLX
128	10502130	GASKET GR. E61 BLOCK
129	10805318	SCREW TE M5X20 W/FLANGE ZN
130	10051106	TOP BOILER TCS 3/8" F 1/4" F.F.M4
131	10455014	RESISTOR 1000W 230V COPPER BOILER TCS
132	10505080	OR 3281 VITON BLACK
133	10505082	OR D9X2.2 SILICON
134	10051108	BOTTOM BOILER TCS 1/4" F.F.RESIS.F.M4"
135	10805592	NUT M10X1 ES13X4.5 FE ZN
136	10805532	NUT KNURLED FLANGED 5MA A2
137	10105310	FASTON 6.3 MALE 120° HOLE D.5
138	10803520	TOOTHED WASHER D5.3 ZN
139	10091152	FILTER HOLDER HANDLE CAP MOD. VERONA
140	10805074	SCREW M4X8 8.8 ZN
141	10803519	TOOTHED WASHER D4.2 ZN
142	10112134	VOLUME MEASURER 1/8" ROHS COMP.
143	10052220	BLIND FILTER
144	10402083	6310 DRAIN TAP 1/8" MF W/LEVER
145	10852028A	T UNION MALE 1010 6-6-1/8" S.C.
146	10091154	FILTER HOLDER HANDLE RING MOD. VERONA
147	10852030A	ELBOW UNION MALE 1020 6-1/8" S.C.
148	10805872	SCREW TC+ M4X6 ZN UNI 7687
149	10853223	T-UNION 1/8" M/M/F
150a	10455052	RESISTOR 2700W 230V COPPER
150b	10455053	RESISTOR 2700W 120V COPPER
150c	10455080	RESISTOR 4500W 230V COPPER
150d	10455054	RESISTOR 5100W 230V COPPER
150e	10455055	RESISTOR 5100W 120V COPPER
151a	10252079A	ELECTRIC MOTOR 150 WATT 120V W/CONNECTOR 2GR
151b	10252080A	ELECTRIC MOTOR 150W 230V W/CONNECTOR 2GR
151c	10252086	ELECTRIC MOTOR 165W 230V W/CONNECTOR 2GR-3GR
152a	10252070A	ROTARY PUMP PA1504 150L/H
152b	10252072A	ROTARY PUMP MOD.PA204
153	10852470	DRIVE HOSE 1/4 TD8-TD8 L.450
154	10852450	DRIVE HOSE 3/8 FD-FD L=2000
155	10852280A	ELBOW UNION MALE 1020 8-3/8" M
156	10852530A	ELBOW UNION MALE 1020 10-3/8" M
157a	10252038	CONDENSOR 6MF 450VL MOT.P.150W
157b	10252040	CONDENSOR 10 MF 450VL MOT.P.165W
158	10002030	BOILER PRESS. SW. CAPILLARY TUBE VR
159	10002021	PUMP PRESS. SW. CAPILLARY TUBE
160	10051104	COMPLETE BOILER TCS SX 1000W 230V
161	10051110	BOILER ASSY. TCS SX 1000W 230V
162	10852200	WASHER D10.5X20X2 FLAT ZN
163	10552013A	DOUBLE SCALE PRESSURE GAUGE D.60
164a	10102190	POWER CABLE 3X2.5 MT3 N5 SINGLE PHASE
164b	10102191	POWER CABLE 5X2.5 MT3 N4 THREE PHASE
164c	10102193	POWER CABLE 3X4 MT3 N7
164d	10102196	CABLE 3x12AWG SJOOW 3MT
164e	10102197	CABLE 3x14AWG SJOOW
165	10105180	2-WAY BLOCK M.
166a	10553021	ORANGE INDICATOR LIGHT D6 230V WIRED
166b	10553024	ORANGE INDICATOR LIGHT D6 120V WIRED
167	10809019	SCREW TBEI M3X8 BRUNITE

168a	10122036A	JUMPER SWITCH, SINGLE PHASE
168b	10122038A	JUMPER SWITCH, THREE-PHASE
170a	10052174	GIGLEUR HOLE D2.5 BOILER OUTPUT
170b	10052176	GIGLEUR HOLE D3 BOILER OUTPUT
170c	10052178	GIGLEUR HOLE D3.5 BOILER OUTPUT
171	10122015	SWITCH KNOB
172	10805119	SCREW TC+ M3X12 CHIP. ZN BLACK
173	10955015	TRIANGULAR VOLTAGE SYMBOL LABEL
174	10905010	HOSE, TRANSPARENT SILICONE 7X4
175	10853058	1510 STRAIGHT HOSE CONNECT. UNION 6-1/8" M
176	10051102	COMPLETE BOILER TCS RH 1000W 230V
177	10051100	BOILER ASSY. TCS RH 1000W 230V
178	10402059	2839 DRAIN TAP 1/8" F W/KNOB
179a	10455024	RESISTOR CUP WARMER VR 3GR 220V D8
179b	10455025	RESISTOR CUP WARMER VR 3GR 220V D8
179c	10455044	RESISTOR CUP WARMER VR 2GR 220V D6
179d	10455045	RESISTOR CUP WARMER VR 3GR 220V D6
180	10402060	BOILER DRAIN TAP KNOB
181	10111010	THERMOSTAT 90° FOR BOILER RESISTOR
182	10402035	ELECT. STEAM WAND KNOB CONNECTOR
183	10852292	STRAIGHT UNION 3/8" M 1/4" M SHORT H
184	10806324	WASHER D17X23X1.5 3/8" COPPER
185	10805512	NUT 4MA MEDIUM ZN
186	10111049	THERMOSTAT 135° WITH MAN. RESET
187	10255022	VIBRATION DAMPER 10X10 M4
188	10042042	BOILER INJECTOR TCS D.8
189	10853226	TOP HEAT EXCH. UNION PISA 3/8X3/8
190	10042040	UNIVERSAL INJECTOR D.8
191	10852180	WASHER 1/4" COPPER
192	10852240A	STRAIGHT UNION 1170 6-1/4" M
193	10853210	RAPID L COUPLING 4-1/8" M
194	10402215A	ELECTRONIC STEAM WAND
195	10022480	SAFETY VALVE DRIP TRAY
196	10402168	LEV. VIEW. WIN. ASSY. VR
197	10402163A	LEV. VIEW. WIN. CAP 1/4"
198	10705015	OR 3043 LEV. VIEW. WIN. SEAL
199	10852901	STRAIGHT REDUCER UNION 2520 1/8"-1/4"
200	10805565B	NUT 3/8 D.11.5 LEV. VIEW. WIN. OR RET.
201	10402100	LEV. VIEW. WIN. MAX-MIN
202	10505550A	PTFE GASKET
203	10852904	HEXAG. EXTENSION STEAM TSS
204	10012378	BRACKET ELEC. WAND VR BLACK
205	10105231A	BOTTOM BLOCK LEV. VIEW. WIN.
206	10012044	LEV. VIEW. WIN. SUPPORT LH VERONA
207	10102540	BOILER THERMOSTAT WIRE VR L.135MM
208	10805075	SCREW TE M5X8 ZN
209a	10002636A	BOILER 2GR D.180
209b	10002637A	BOILER 3GR D.180
210	10105230A	TOP BLOCK LEV. VIEW. WIN.
211	10042020A	LEV. VIEW. WIN. SPACER
212	10853232A	BOILER BOTT. HEAT EXCHANGER UNION VR
213	10853227	BOILER TOP HEAT EXCHANGER UNION TV
214a	10002660B	BOILER 2GR D.205
214b	10002655B	BOILER 3GR D.205
215	10853053A	STRAIGHT INTAKE TUBE 1/4" M
216	10852293	1050 STRAIGHT UNION 8-3/8" MAS.
217	10852540	2611 1/4" M ACC. UNION CAP
218	10652040A	BOILER AIR VENT VALVE
219	10652010	SAFETY VALVE
220	10112064	LEVEL SENSOR 120mm
221	10502020	PTFE WASHER FOR RESISTOR
222	10852060A	ELBOW UNION 1020 8-1/4" M
223	10112042	LEVEL SENSOR 140mm
224	10106060	RESISTOR CONNECTOR BRASS
225	10852290A	STRAIGHT UNION 1050 10-3/8" M
226	10855032A	STRAIGHT UNION 1050 8-1/4" M


ENGLISH

227	10112178	NTC TEMP. SENSOR 1/4" M
228a	10112083A	ON-OFF CONTROL UNIT GR.1-2-3 XLC
228b	10112172	DE LUXE RELAYS CONTROL UNIT VERONA
228c	10112173	DE LUXE RELAYS CONTROL UNIT VERONA TCS-ROMA
228d	10112174	DE LUXE RELAYS CONTROL UNIT VERONA STEAM
228e	10112175	DE LUXE RELAYS CONTROL UNIT VERONA TCS STEAM
229a	10112158A	KEYPAD VR 6 KEYS SED
229b	10112164	KEYPAD VR 2 KEYS SAP
230	10553080	BIP. SWITCH GOCCIA
231	10553078	SUPPORT D. 16 BLACK W/ANTIROTATION
232	10553086	CONVEX KEY BLACK PRINT. WHITE CUP
233	10553088	CONVEX KEY BLACK PRINT. WHITE RESIS.
234a	10102384	WIRING VERONA 2GR SED RELAYS
234b	10102410	WIRING VERONA TALL 2GR SED RELAYS
234c	10102388	WIRING VERONA 3GR SED RELAYS
234d	10102420	WIRING VERONA TALL 3GR SED RELAYS
235a	10102386	ADDITIONAL WIRING VERONA 2GR TCS SED RELAYS
235b	10102412	ADDITIONAL WIRING VERONA TALL 2GR TCS SED RELAYS
235c	10102390	ADDITIONAL WIRING VERONA 3GR TCS SED RELAYS
235d	10102422	ADDITIONAL WIRING VERONA TALL 3GR TCS SED RELAYS
236	10112180A	CONTROL UNIT PIDBULL GR.2-3 380VAC
237	10203075	SCREW TC+ M4x25 ZN
238	10091186	TRANS. FRAME PRESSURE GAUGE VERONA
239	10112162	KEYPAD VERONA 2 KEYS PIDBULL
240	10031040	LARGE DISPLAY GLASS VERONA
241	10112044	LARGE DISPLAY VERONA
242	10031014	BOX REAR DISPLAY VERONA
243	10805172	SCREW TC+ M3x20 ZN
244a	10112106	CABLE, PIN TO PIN, 1100mm AMP 6 WAY
244b	10112109	CABLE, PIN TO PIN, 320mm AMP 6 WAY
245	10112067	CABLE, PIN TO PIN, 1100mm
246	10112079	CABLE, PIN TO PIN, 800mm
247	10112073	CABLE, PIN TO PIN, 900mm
248	10112196	TEMP. SENSOR EXTENSION WIRE 700MM
249	10112194	TEMP. SENSOR PTP-51F
250	10002510A	TOP HEAT EXCHANGER TUBE RH TCS VR
251	10002516	TOP HEAT EXCHANGER TUBE LH TCS VR
252	10002512A	BOTT. HEAT EXCHANGER TUBE RH TCS VR
253	10002514A	BOTT. HEAT EXCHANGER TUBE LH TCS VR
254	10002522	STEAM TUBE LH VR TCS 2-3GR
255	10002524	STEAM TUBE RH VR TCS 2-3GR
256a	10002518	BOILER FILL HOSE VR TCS 2GR
256b	10003032	BOILER FILL HOSE VR TCS 3GR
257	10002526	WATER OUTPUT HOSE VR TCS 2-3GR
258a	10002520	BOILER DRAIN HOSE VR TCS 2GR
258b	10002740	BOILER DRAIN HOSE VR MUG TCS 2GR
258c	10003034	BOILER DRAIN HOSE VR TCS 3GR
258d	10003038	BOILER DRAIN HOSE VR TCS TALL 3GR
259	10002534	HEAT EXCH. CONNECT. TUBE VR TCS 2-3GR
260a	10002532A	VOLUM. MEAS. SUPPLY HOSE VR TCS 2GR SED
260b	10002744	VOLUM. MEAS. FILL TUBE VR TCS TALL 2GR SED
260c	10002702	VOLUM. MEAS. FILL TUBE VR 3GR
260d	10002702A	VOLUM. MEAS. FILL TUBE VR TCS 3GR SED
260e	10003042	VOLUM. MEAS. FILL TUBE VR TCS TALL 3GR SED
261a	10002530	SUPPLY HOSE GR. 1-2 VR TCS 2-3GR SED
261b	10002742	FILL TUBE GR. 1-2 VR TCS TALL 2-3GR SED
261c	10003036	SUPPLY HOSE GR. 3 VR TCS 3GR SED
261d	10003040	FILL TUBE GR. 3 VR TCS TALL 3GR SED
262a	10002498	CONNECT. TUBE VOL. 1-2 PI 2-3GR SED
262b	10002209	JUMPER TUBE VOL. 2-3 PI 3GR SED
263a	10002592	STEAM TUBE SX VR 2GR
263b	10002692	STEAM TUBE LH VR 3GR
264a	10002584	TOP LEV. VIEW. WIN. TUBE VR 2GR
264b	10002684	TOP LEV. VIEW. WIN. TUBE VR 3GR
265	10002582	TOP HEAT EXCH. TUBE VR 2-3GR
266	10002580	BOTT. HEAT EXCH. TUBE VR 2-3GR

267a	10002586	BOTT. LEV. VIEW. WIN. TUBE VR 2GR
267b	10002686	BOTT. LEV. VIEW. WIN. TUBE VR 3GR
268a	10002598	SUPPLY HOSE GR. 1 VR 2-3GR SED
268b	10002754	FILL TUBE GR. 1 VR TALL 2-3GR SED
269a	10002596	WATER OUTPUT HOSE VR 2GR
269b	10002696	WATER OUTPUT HOSE VR 3GR
270a	10002594	STEAM TUBE RH VR 2GR
270b	10002694	STEAM TUBE RH VR 3GR
271a	10002588	BOILER FILL HOSE VR 2GR
271b	10002688	BOILER FILL HOSE VR 3GR
272a	10002602	VOLUM. MEAS. FILL TUBE VR 2GR
272b	10002750	VOLUM. MEAS. FILL TUBE VR TALL 2GR
272c	10002702	VOLUM. MEAS. FILL TUBE VR 3GR
272d	10002758	VOLUM. MEAS. FILL TUBE VR TALL 3GR
273a	10002600	SUPPLY HOSE GR. 2 VR 2GR
273b	10002756	FILL TUBE GR. 2 VR TALL 2-3GR
273c	10002700	SUPPLY HOSE GR. 2 VR 3GR
273d	10002704	SUPPLY HOSE GR. 3 VR 3GR
273e	10002760	FILL TUBE GR. 3 VR TALL 3GR
274a	10002590	BOILER DRAIN HOSE VR 2GR
274b	10002752	BOILER DRAIN HOSE VR TALL 2GR
274c	10002690	BOILER DRAIN HOSE VR 3GR
274d	10002762	BOILER DRAIN HOSE VR TALL 3GR
275	10853215	T UNION 1/8" M/F/F
276	10852000	FLOW REDUCER
277	10805060	SCREW TCEI M4X6 A2
278	10303010A	SOLENOID VALVE 1/8 2-WAY230V
279	10909010	TEFLON HOSE D.4X2.5
280	10102392	WIRING ELECT. LANCE VR-VR TCS 2-3GR
281	10112186	RELAY CONTROL UNIT EXPANSION
282	10002540	CONNECT. HOSE ELECT. WAND VR2-3GR WITH WATER SV
283a	10002542	STEAM TUBE LH VR TCS 2-3 LANCE TSS
283b	10002608	STEAM HOSE LH VR2 LANCE TSS
283c	10002710	STEAM HOSE LH VR3 LANCE TSS
284	10852520	REDUCER UNION 1/4M- 1/8F
285	10855555	EXTENSION L.16 1/8M 1/8F
286a	10002538	CONNECT. HOSE WASHING SV VR2 WITH WATER SV
286b	10002708	CONNECT. HOSE WASHING SV VR3 WITH WATER SV
287	10112218	STATIC RELAY COVER
288	10805114	SCREW TC+ SW M5X12 ZN
289	10112216A	STATIC RELAY
290	10112198	POWER CABLE RELAYS
291a	10002536	HEAT EXCH. FILL HOSE VR TCS 2GR D.1 HOLE
291b	10002706	HEAT EXCH. FILL HOSE VR TCS 3GR D.1 HOLE
292	10753056	ANTI-BURN JOINT FOR LANCE TSS
293a	10102086A	WIRING CUP WARMER VR 2-3GR
293b	10102414	CUP WARMER WIRING VR TALL 2-3GR
294	10012432	ESPRESSO GRILLE VR TALL
295	10052064	DRIP TRAY CAP
296	10012346	SWITCH PROT. SUPPORT BRACKET VR 2-3GR
297a	10352142	SWITCH PROT. VR 2GR
297b	10352146	SWITCH PROT. VR 3GR

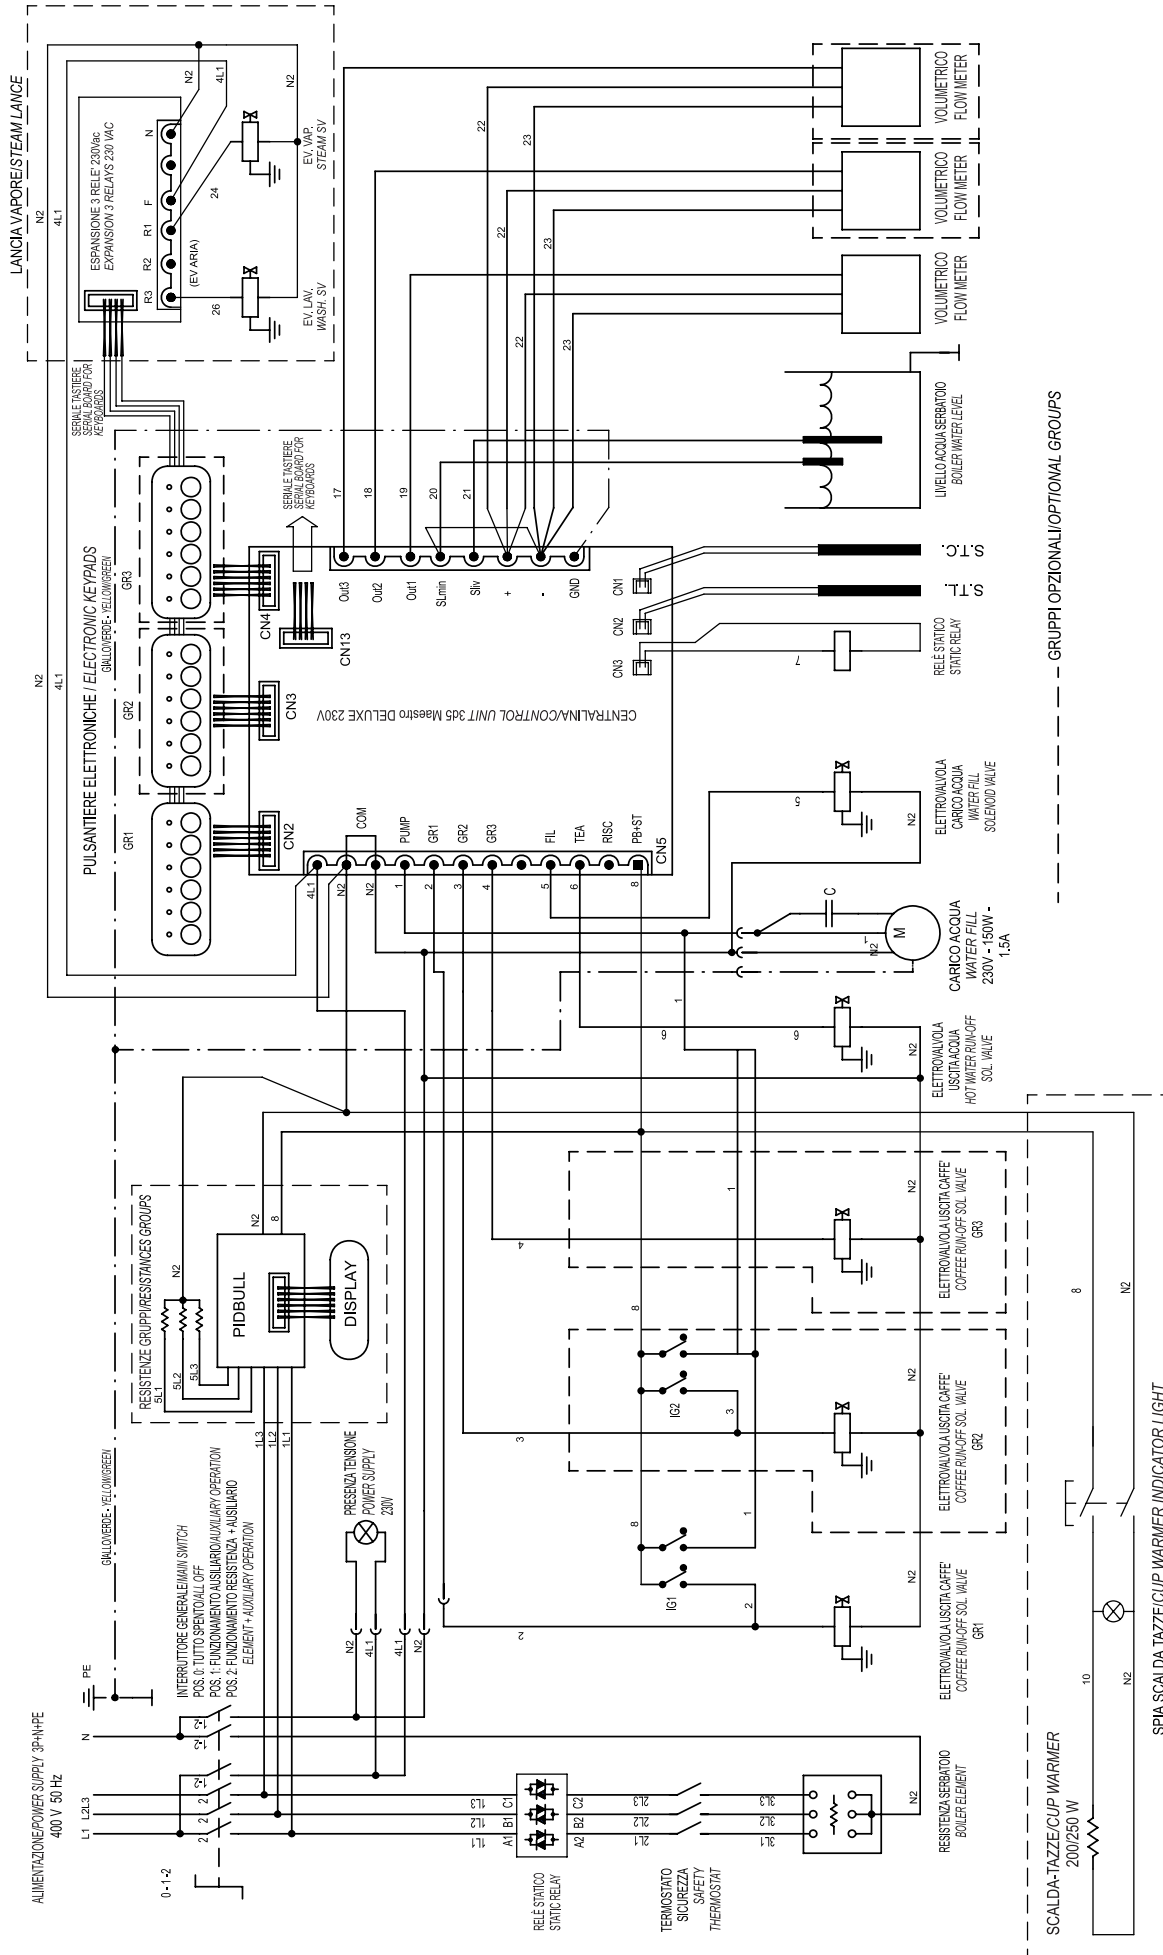


Schema circuito idraulico VERONA SED e SAP Agg. 08/08

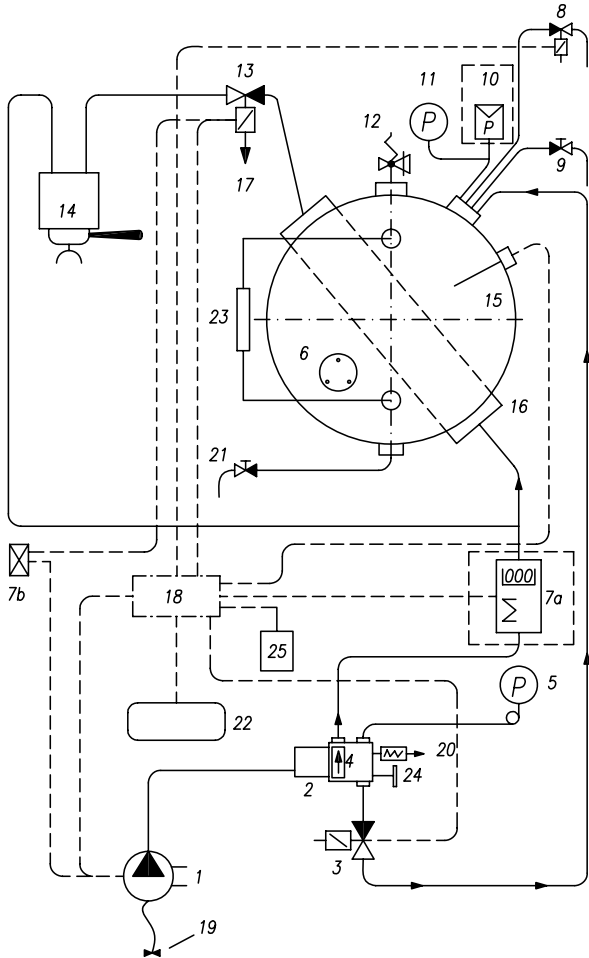

1. Pompa di alimentazione
2. Distributore acqua con filtro
3. Elettrovalvola per riempimento automatico
4. Valvola di non ritorno
5. Manometro pressione pompa (f.s. 16bar)
6. Resistenza elettrica di riscaldamento
- 7a. Misuratore volumetrico (su versione SED)
- 7b. Interruttore comando erogazione
8. Elettrovalvola prelievo acqua calda
9. Rubinetto prelievo vapore
10. Pressostato di funzionamento (su versione SAP)
11. Manometro pressione caldaia (f.s. 5.5bar)
12. Valvola di sicurezza
13. Elettrovalvola di erogazione
14. Gruppo di erogazione
15. Caldaia
16. Scambiatore
17. Scarico valvola di erogazione
18. Centralina comando erogazione automatica
19. Collegamento rete idrica
20. Valvola di espansione
21. Rubinetto scarico caldaia
22. Pulsantiera
23. Vetro livello
24. Rubinetto carico manuale
25. Relè statico

Schema circuito idraulico VERONA TCS Agg. 08/08

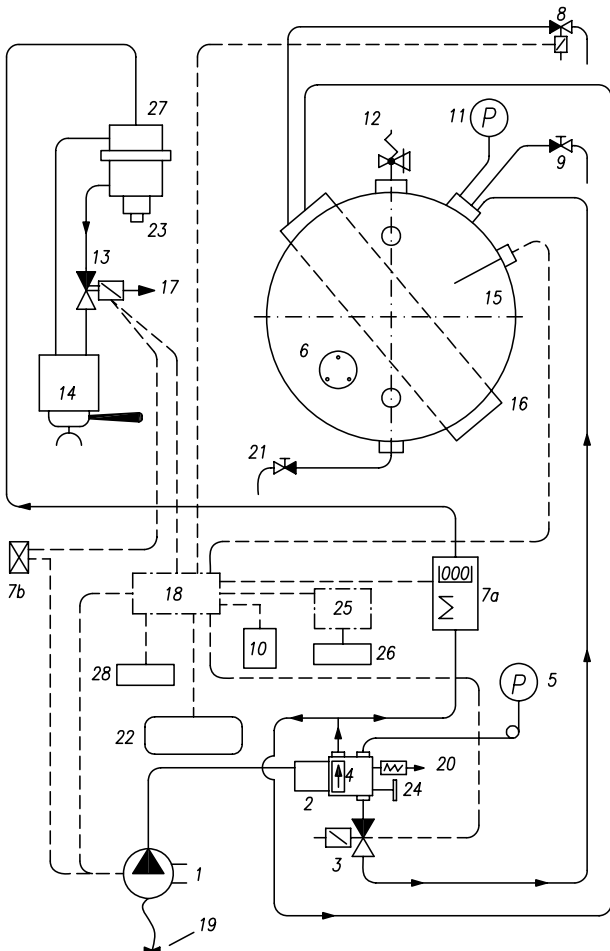

1. Pompa di alimentazione
2. Distributore acqua con filtro
3. Elettrovalvola per riempimento automatico
4. Valvola di non ritorno
5. Manometro pressione pompa (f.s. 16bar)
6. Resistenza elettrica di riscaldamento
- 7a. Misuratore volumetrico
- 7b. Interruttore comando erogazione
8. Elettrovalvola prelievo acqua calda
9. Rubinetto prelievo vapore
10. Relè statico
11. Manometro pressione caldaia (f.s. 5.5bar)
12. Valvola di sicurezza
13. Elettrovalvola di erogazione
14. Gruppo di erogazione
15. Caldaia
16. Scambiatore
17. Scarico valvola di erogazione
18. Centralina comando erogazione automatica
19. Collegamento rete idrica
20. Valvola di espansione
21. Rubinetto scarico caldaia
22. Pulsantiera
23. Resistenza el. caldaia gruppi
25. Centralina regolazione temperatura gruppi Pidbull
26. Pulsantiera Pidbull
27. Gruppo caldaia
28. Display

English

Hydraulic circuit diagram VERONA SED SAP Update 08-08

1. Supply pump
2. Water distributor with filter
3. Solenoid valve for automatic fill
4. Non-return valve
5. Pump pressure gauge (f.s. 16 bars)
6. Electrical heating element
- 7a. Flow meter (on SED version)
- 7b. Distribution control switch
8. Hot water run-off sol. valve
9. Steam tap
10. Operating pressure gauge
11. Boiler pressure gauge (f.s. 16 bars)
12. Safety valve
13. Run-off solenoid valve
14. Run-off assembly
15. Boiler
16. Heat exchanger
17. Run-off valve outlet
18. Automatic run-off control unit
19. Connection to water main
20. Expansion valve
21. Boiler drain tap
22. Keypad
23. Glass level
24. Manual load faucet
25. Static relay

Hydraulic circuit diagram VERONA TCS Update 08-08

1. Supply pump
2. Water distributor with filter
3. Solenoid valve for automatic fill
4. Non-return valve
5. Pump pressure gauge (f.s. 16 bars)
6. Electrical heating element
- 7a. Flow meter
- 7b. Distribution control switch
8. Hot water run-off sol. valve
9. Steam tap
10. Static relay
11. Boiler pressure gauge (f.s. 16 bars)
12. Safety valve
13. Run-off solenoid valve
14. Run-off assembly
15. Boiler
16. Heat exchanger
17. Run-off valve outlet
18. Automatic run-off control unit
19. Connection to water main
20. Expansion valve
21. Boiler drain tap
22. Keypad
23. Groups boiler electric resistance
25. Pidbull temperature regulating control unit
26. Pidbull keyboard
27. Boiler group
28. Display

Deutsch

Schema hydraulikkreis VERONA SED - SAP Aktualisierung 08-08

1. Speisepumpe
2. Wasserverteiler mit Filter
3. Elektroventil für automatische Befüllung
4. Rückschlagventil
5. Manometer Pumpendruck (f.s. 16bar)
6. Elektrisches Heizelement
- 7a. Volumenmesser (in SED Version)
- 7b. Ausgabeschalter
8. Heißwasserhahn
9. Dampfahn
10. Betriebsdruckwächter
11. Manometer Kesseldruck (f.s. 5.5bar)
12. Sicherheitsventil
13. Ausgabe-Elektroventil
14. Ausgabegruppe
15. Kessel
16. Wärmetauscher
17. Auslass Ausgabeventil
18. Steuergerät Automatische Ausgabe
19. Wassernetzanschluss
20. Ausdehnungsventil
21. Kesselablasshahn
22. Drucktastentafel
23. Standglas
24. Hahn zur manuellen Füllung
25. Statisches Relais

Schema hydraulikkreis VERONA TCS Aktualisierung 08-08

1. Speisepumpe
2. Wasserverteiler mit Filter
3. Elektroventil für automatische Befüllung
4. Rückschlagventil
5. Manometer Pumpendruck (f.s. 16bar)
6. Elektrisches Heizelement
- 7a. Volumenmesser
- 7b. Ausgabeschalter
8. Heißwasserhahn
9. Dampfahn
10. Statisches Relais
11. Manometer Kesseldruck (f.s. 5.5bar)
12. Sicherheitsventil
13. Ausgabe-Elektroventil
14. Ausgabegruppe
15. Kessel
16. Wärmetauscher
17. Auslass Ausgabeventil
18. Steuergerät Automatische Ausgabe
19. Wassernetzanschluss
20. Ausdehnungsventil
21. Kesselablasshahn
22. Drucktastentafel
23. Elektrisches Heizelement Kessel Gruppen
25. Steuergerät Temperaturregelung Pidbull Gruppen
26. Tastatur Pidbull
27. Gruppe Kessel
28. Display

Français

Schéma circuit hydraulique VERONA SED e SAP mise à jour 08/08

1. Pompe d'alimentation
2. Distributeur d'eau avec filtre
3. Electrovalve pour remplissage automatique
4. Clapet de non-retour
5. Manomètre pression pompe (max. 16 bars)
6. Résistance électrique de chauffage
- 7a. Mesureur volumétrique (sur version SED)
- 7b. Interrupteur commande distribution
8. Electrovanne prélèvement eau chaude
9. Robinet prélèvement vapeur
10. Pressostat de fonctionnement
11. Manomètre pression chaudière (max. 5,5 bars)
12. Soupape de sûreté
13. Electrovalve de sortie
14. Groupe de sortie
15. Chaudière
16. Échangeur
17. Décharge soupape de sortie
18. Boîtier commande sortie automatique
19. Branchement réseau de distribution d'eau
20. Soupape d'expansion
21. Robinet décharge chaudière
22. Tableau de commande
23. Verre niveau
24. Robinet de remplissage manuel
25. Relais statique

Schéma circuit hydraulique VERONA TCS mise à jour 08/08

1. Pompe d'alimentation
2. Distributeur d'eau avec filtre
3. Electrovalve pour remplissage automatique
4. Clapet de non-retour
5. Manomètre pression pompe (max. 16 bars)
6. Résistance électrique de chauffage
- 7a. Mesureur volumétrique
- 7b. Interrupteur commande distribution
8. Electrovanne prélèvement eau chaude
9. Robinet prélèvement vapeur
10. Relais statique
11. Manomètre pression chaudière (max. 5,5 bars)
12. Soupape de sûreté
13. Electrovalve de sortie
14. Groupe de sortie
15. Chaudière
16. Échangeur
17. Décharge soupape de sortie
18. Boîtier commande sortie automatique
19. Branchement réseau de distribution d'eau
20. Soupape d'expansion
21. Robinet décharge chaudière
22. Tableau de commande
23. Résistance él. chaudière groupes
25. Centrale régulation température groupes Pidbull
26. Clavier Pidbull
27. Groupe chaudière
28. Display

Espagnol

Esquema circuito hidraulico VERONA SED - SAP act. 08/08

1. Bomba de alimentación
2. Distribuidor agua con filtro
3. Electroválvula para llenado automático
4. Válvula antirretorno
5. Manómetro presión bomba (f.e. 16bar)
6. Resistencia eléctrica de calentamiento
- 7a. Medidor volumétrico (en versión SED)
- 7b. Interruptor accionamiento erogación
8. Electroválvula salida agua caliente
9. Grifo salida vapor
10. Presóstato de funcionamiento
11. Manómetro presión bomba (f.e. 5.5bar)
12. Válvula de seguridad
13. Electroválvula de erogación
14. Grupo de erogación
15. Caldera
16. Intercambiador
17. Descarga válvula de erogación
18. Centralita de mando erogación automática
19. Conexión red hídrica
20. Válvula de expansión
21. Grifo descarga caldera
22. Botonera
23. Nivel de vidrio
24. Grifo carga manual
25. Relé estático

Esquema circuito hidraulico VERONA TCS act. 08/08

1. Bomba de alimentación
2. Distribuidor agua con filtro
3. Electroválvula para llenado automático
4. Válvula antirretorno
5. Manómetro presión bomba (f.e. 16bar)
6. Resistencia eléctrica de calentamiento
- 7a. Medidor volumétrico
- 7b. Interruptor accionamiento erogación
8. Electroválvula salida agua caliente
9. Grifo salida vapor
10. Relé estático
11. Manómetro presión bomba (f.e. 5.5bar)
12. Válvula de seguridad
13. Electroválvula de erogación
14. Grupo de erogación
15. Caldera
16. Intercambiador
17. Descarga válvula de erogación
18. Centralita de mando erogación automática
19. Conexión red hídrica
20. Válvula de expansión
21. Grifo descarga caldera
22. Botonera
23. Resistencia elem. caldera grupos
25. Centralita regulación temperatura grupos Pidbull
26. Teclado Pidbull
27. Grupo caldera
28. Display

VERONA

FOREWORD

This manual is for use by qualified personnel and contains information and tips to use and keep your coffee maker as efficiently as possible. Please read all instructions very carefully before you actually use your machine to make sure the machine works properly and to ensure a long working life. Instructions are part of the product. Please keep this document.


Model – VERONA SAP

Semi-automatic with continual dispensing through special pushbutton panel with indicator lights and switch for continual manual dispensing. Available in **2 - 3 group versions**.

Model – VERONA SED - SED TCS

Electronic model controlled by microprocessor with dispensing programmable through special pushbutton panel with indicator lights and switch for continual manual dispensing. Available in **2 - 3 group versions**.

SPECIFICATIONS

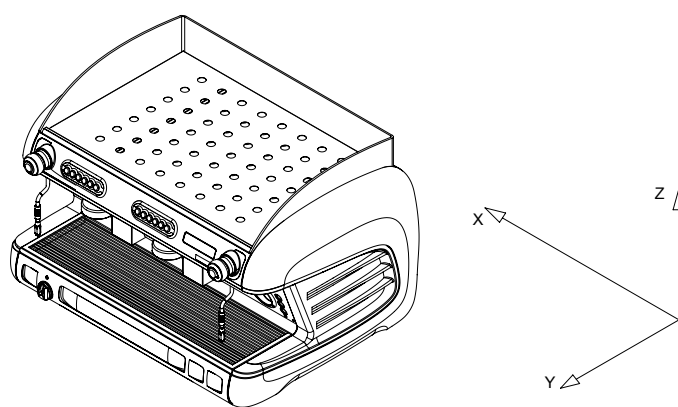

	GROUPS	2 BASE	2 TCS	2 BASE TALL	2 TCS TALL	3 BASE	3 TCS	3 BASE TALL	3 TCS TALL
Width (X)	mm	820	820	820	820	1050	1050	1050	1050
Depth (Y)	mm	610	610	610	610	610	610	610	610
Height (Z)	mm	590	590	652	652	590	590	652	652
Boiler capacity	litres	12	8,6	12	8,6	19	14	19	14
Small boiler capacity	litres	/	0,33	/	0,33	/	0,33	/	0,33
Net weight	Kg	68	68	75	75	85	85	92	92
Gross weight	Kg	74	74	82	82	91	91	99	99
Supply voltage	V	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~	120 220-240 ~ 380-415 ~
Power absorbed by the boiler resistance	kW	2,7/4,5	2,7	2,7/4,5	2,7	5,1	2,7	5,1	2,7
Power absorbed by the tcs small boiler resistance	kW	/	1	/	1	/	1	/	1
Power absorbed by cup warmer	kW	0,2	0,2	0,2	0,2	0,25	0,25	0,25	0,25
Power absorbed by the electric pump	kW	0,15/0,165	0,15/0,165	0,15/0,165	0,15/0,165	0,15/0,165	0,165	0,15/0,165	0,165
Power absorbed by the solenoid valves	kW	0,15/0,165	0,15/0,165	0,15/0,165	0,15/0,165	0,15/0,165	0,187	0,15/0,165	0,187
Power absorbed by the external electric pump	kW	0,0225	0,0225	0,0225	0,0225	0,0315	0,0315	0,0315	0,0315
Power absorbed by the automatic level regulator	kW	0,01	0,01	0,01	0,01	0,01	0,01	0,01	0,01
Boiler project pressure	(2 Bar) MPa	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2
Boiler working pressure	(0,8-1 Bar) MPa	0,08:0,1	0,08:0,1	0,08:0,1	0,08:0,1	0,08:0,1	0,08:0,1	0,08:0,1	0,08:0,1
Safety valve calibration pressure	(1,8 Bar) MPa	0,18	0,18	0,18	0,18	0,18	0,18	0,18	0,18
Heat exchanger project pressure	(20 Bar) MPa	2	2	2	2	2	2	2	2
Heat exchanger safety valve calibration pressure	(12 Bar) MPa	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2
Water mains pressure (max)	(6 Bar) MPa	0,6	0,6	0,6	0,6	0,6	0,6	0,6	0,6
Coffee distribution pressure	(8-9 Bar) MPa	0,8/0,9	0,8/0,9	0,8/0,9	0,8/0,9	0,8/0,9	0,8/0,9	0,8/0,9	0,8/0,9

The weighted sound pressure level A of the coffee machine is less than 70dB.

For correct appliance operation and trouble-free maintenance, please read this booklet carefully and comply with the instructions and rules, also referring to the diagrams given in it.

INSTALLATION


Before installing the appliance ensure that the mains voltage and power correspond to the data given in the specifications table. Take the appliance out of the packaging and put it in its final place of installation ensuring that it is stable and safe and that there is the necessary space for using it. Place the machine in a way that the distance between the grid and the floor is wider than 1,5 mt. To clean the internal circuit more efficiently, you are recommended to empty and fill the boiler a number of times and deliver simple water and coffee to be thrown away.

ELECTRICAL CONNECTION


Before connecting the power cable, follow the instructions below to install a safety switch and of the proper capacity:
 Install ground cable, then phase cables. Uninstall phase cables first and then ground if needed.
 Make sure the ground connection complies with existing standards and regulations.
 N.B. CHECK THAT THE DATA ON THE RATING PLATE CORRESPOND TO YOUR MAINS ELECTRICITY SUPPLY.

INSTALLING THE POWER SUPPLY CABLE


Connection of the resistance

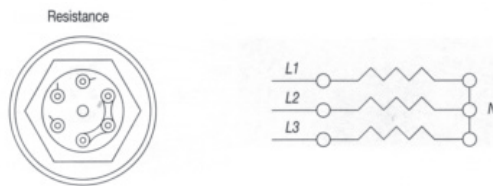


Electrical feeding variance

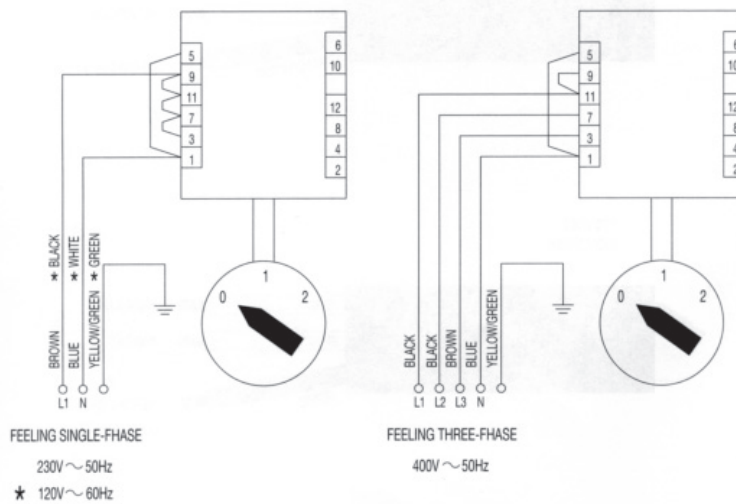


400 VOLTS
THREE-PHASE + NEUTRAL

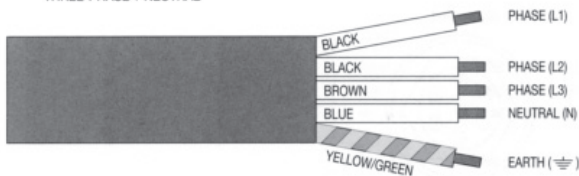

230 VOLTS
SINGLE-PHASE

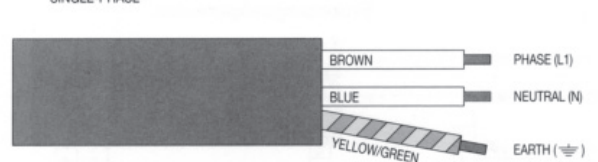

120 VOLTS
SINGLE-PHASE

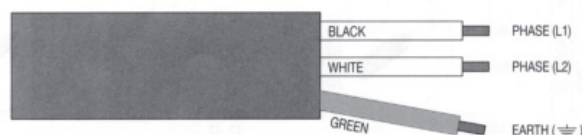

Feeding cable installation diagram

WATER CONNECTION

- 1) Only cold water must be supplied to the appliances.
- 2) If the mains water pressure exceeds 6 bar, a pressure reducer must be installed to regulate the outlet pressure to a maximum of 6 bar.
- 3) Connect the drain hose to the tray, avoiding sharp bends and keeping a sufficient slope for regular flow of the drain water.
- 4) Connect the 3/8" hose to the mains outlet and then to the water softener and to the appliance.

N.B. A water softener is indispensable for correct appliance operation, best coffee in the cup and long life of the components, since it removes scale and residues from the water that would otherwise shorten their life.

The company is relieved of all and any liability in the event of failure to comply with the above instructions.

Open the tap and let water flow through the deconcentrator to clear dirt off the circuit before plugging the hose into the pump.

USE

Preliminary check

Before using the appliance, check that:


- the plug is inserted properly into the mains power outlet;
- the filling hose is correctly connected to the mains outlet and that the water supply is open. Also check for leaks;
- the drain hose is positioned according to the above instructions and fixed by a hose clamp.

With the steam tap (B) open, put the on/off switch (D) to position 1 and wait for the water in the boiler to reach the maximum level set by the electronic control, which can be visually checked on the level indicator (L). If the boiler does not fill within the set time-out (90 sec.), the pump stops and the indicator lights on the control panel start to blink. If this happens, put the on/off switch (D) to position 0 and then to position 1 per to complete filling of the boiler.

Then put the on/off switch (D) to position 2, which switches on the electric heating elements to start heating the water.

Wait for steam to come out the steam nozzle (B), then close the tap and, using the Boiler pressure gauge, check that the pressure has reached and maintains a value of 0.8:1 bar. If not, use a screwdriver to turn the pressure switch adjustment screw towards + or - as shown below SAP version.

In the SED version, see programming of the 3DS MAESTRO DE LUX control unit.



N.B. Manual filling

Even if the control unit fails to operate, the appliance boiler (A) may be filled manually.

With the visual help of the level indicator (L), keep the manual filling knob (A) pressed until the water fills the boiler, taking care not to exceed the maximum indicator level (L); then release the knob. In this circumstance, use the manual switch (R) to dispense coffee.

Hot water

Check through the water level indicator (L) that there is sufficient water in the boiler before dispensing hot water or steam.

Ensure that the boiler pressure gauge indicates a pressure of 0.5:1 bar.

Press the button (M6) to dispense hot water and press again to stop.

Pay the utmost attention in order to prevent scald burns.

Steam

Except for the 1-group machine that has just one steam nozzle, all the other models have 2 located at the sides. These steam nozzles are recessed but can swivel out thanks to an articulated joint. To dispense steam, just turn the knobs (B) counter-clockwise.

Pay the utmost attention in order to prevent scald burns.

Coffee with Mod. VERONA SAP

Insert the filter holder (E) into the group head (F) turning the filter holder counter-clockwise. Press the button (I) and wait for the required quantity of coffee to be dispensed, then put it back to its original position.

Coffee with Mod. VERONA SED - TCS SED

Insert the filter holder (E) into the group head (F) turning the filter holder counter-clockwise. Using the keypad (M) select the caption corresponding to the required type of coffee:

M1 = One strong/normal coffee.

M2 = One normal/weak coffee.

M3 = Two strong/normal coffees.

M4 = Two normal/weak coffees.

M5 = Key for electronic programming or continual manual dispensing.

Before using the appliance the operator must check that the water level in the boiler is above the minimum level by looking at the indicator (L).

DISPENSER PROGRAMMING

- a) To access this phase keep the button M5 on the first pushbutton panel on the left pressed for over 5 seconds. The indicator lights of the buttons M5 start to blink continuously. Select the caption corresponding to the amount required and press to dispense. The indicator light of button M5 and that of the selected caption remain lit. When the required amount has been dispensed, press the selected dispensing button again so that the control unit stores the data. Repeat the above procedure for all 4 dispensing buttons on the pushbutton panel. A dispensed quantity

may also be set for the hot water button (M6) by repeating the above procedure. Upon completion of the procedure, the remaining groups will automatically use the stored quantity. The other groups may, however, be programmed independently by repeating the same procedure as above after having programmed the first group on the left.

- b) There are 2 safety systems inside the control unit designed to protect the electronic system and the various parts of the appliance. If, upon pressing a dispensing button, the corresponding indicator light starts blinking, this indicates a malfunction in the electronic system or lack of water. For safety reasons, the dispensing of water stops after 4 minutes and in any case after 4 litres of water.
- c) The VERONA electronics also offers the possibility of reproducing the pre-brewing effect by wetting the coffee for 0.6 seconds and then stopping the subsequent brewing from starting for 1.2 seconds. This optional is only applicable for single shots of coffee.

CLEANING

Filter: after having dispensed the last cup of coffee, the filter and filter holder must be washed with water. If they are damaged, worn or clogged, they should be replaced.

Drip tray and grid: the drip tray and grid should be removed frequently and coffee residues cleaned away. Use hot water to clean the coffee ground discharge tray to avoid coffee ground fermentation and related smell.

Water softener: the softener should be periodically regenerated according to the manufacturer's directions given in the instruction booklet.

External housing: the external housing and the steel parts should be cleaned with sponges and soft cloths to avoid scratching. Only use detergents that do not contain abrasive powders or solvents and do not use steel wool.

WARNINGS: when using the appliance it is recommended that the various instruments be kept under control, checking that they are in the previously indicated normal working conditions.

When the appliance has been left unused for a number of days, or every 2/3 months during normal use, to clean the internal circuits more efficiently, it is good practice to fill the boiler a number of times and deliver simple water and coffee to be thrown away.

APPLIANCE FAILURE

the user must check that this is not due to:

- power failure or blackout
- lack of mains water supply or no water inside the boiler.

For any other causes, contact a qualified SANREMO After-Sales Service Centre.

BEFORE CARRYING OUT ANY WORK INSIDE THE APPLIANCE OR REMOVING ANY PART OF THE HOUSING, ALWAYS DISCONNECT FROM THE ELECTRICITY SUPPLY.

WARRANTY

Every purchased appliance (keep the receipt, invoice and delivery note) is covered by a statutory guarantee. This warranty envisages the replacement free of charge of parts that are shown to the service centre or manufacturer's satisfaction to be defective due to faulty materials or workmanship and providing that the appliance has not been misused or tampered with by unauthorised persons or persons using incorrect components or techniques.

Any defective part shall be returned to the manufacturer.

NOTE: never activate the pump without water. Excessive heat will damage the pump and **no warranty replacement is granted in that case.**

WARNINGS

The appliance must not be cleaned using a water jet.

Do not put the appliance in water.

The appliance must not be positioned near to any source of heat.

The appliance is unsuitable for outdoor installation.

To ensure safe use the appliance must be in a level position.

If the power cable is damaged, have it replaced by a SANREMO After-Sales Service Centre, since a special tool is required for this purpose.

The appliance must be used in rooms with a temperature between 5°C and 35°C.

IN THE EVENT OF FAILURE OR MALFUNCTION, REQUEST SERVICE ONLY FROM QUALIFIED PERSONNEL AT THE AFTER-SALES SERVICE CENTRE.

The data and features indicated in this booklet are not binding on the manufacturer, which reserves the right to make changes to its models at any time.

The manufacturer shall not be under any liability for injury to persons or damage to property arising from failure to comply with the instructions given in this booklet.

INFORMATION FOR USERS

In accordance with article 13 of legislative decree no. 151 "Implementation of directives 2002/95/EC, 2002/96/EC and 2003/108/EC on restriction of the use of certain hazardous substances in electrical and electronic equipment and the disposal of waste".

The appliance or packaging is marked with the symbol of a bin with a cross to indicate that at the end of its working life it must be disposed of separately from other waste.

Separate collection of this appliance at the end of its working life is organised and managed by the manufacturer.


The user wanting to dispose of this appliance should therefore contact the manufacturer and follow the separate waste collection system to dispose of the appliance at the end of its working life.

Appropriate separate collection and the subsequent recycling, treatment and ecological disposal of the disused appliance help avoid possible negative effects on the environment and health and encourage the re-use and/or recycling of the constituent materials.

The unlawful disposal of the product by the user is punishable by the administrative sanctions provided for by the legislation in force at the time.



Instructions and connection of cup warmer and external pump

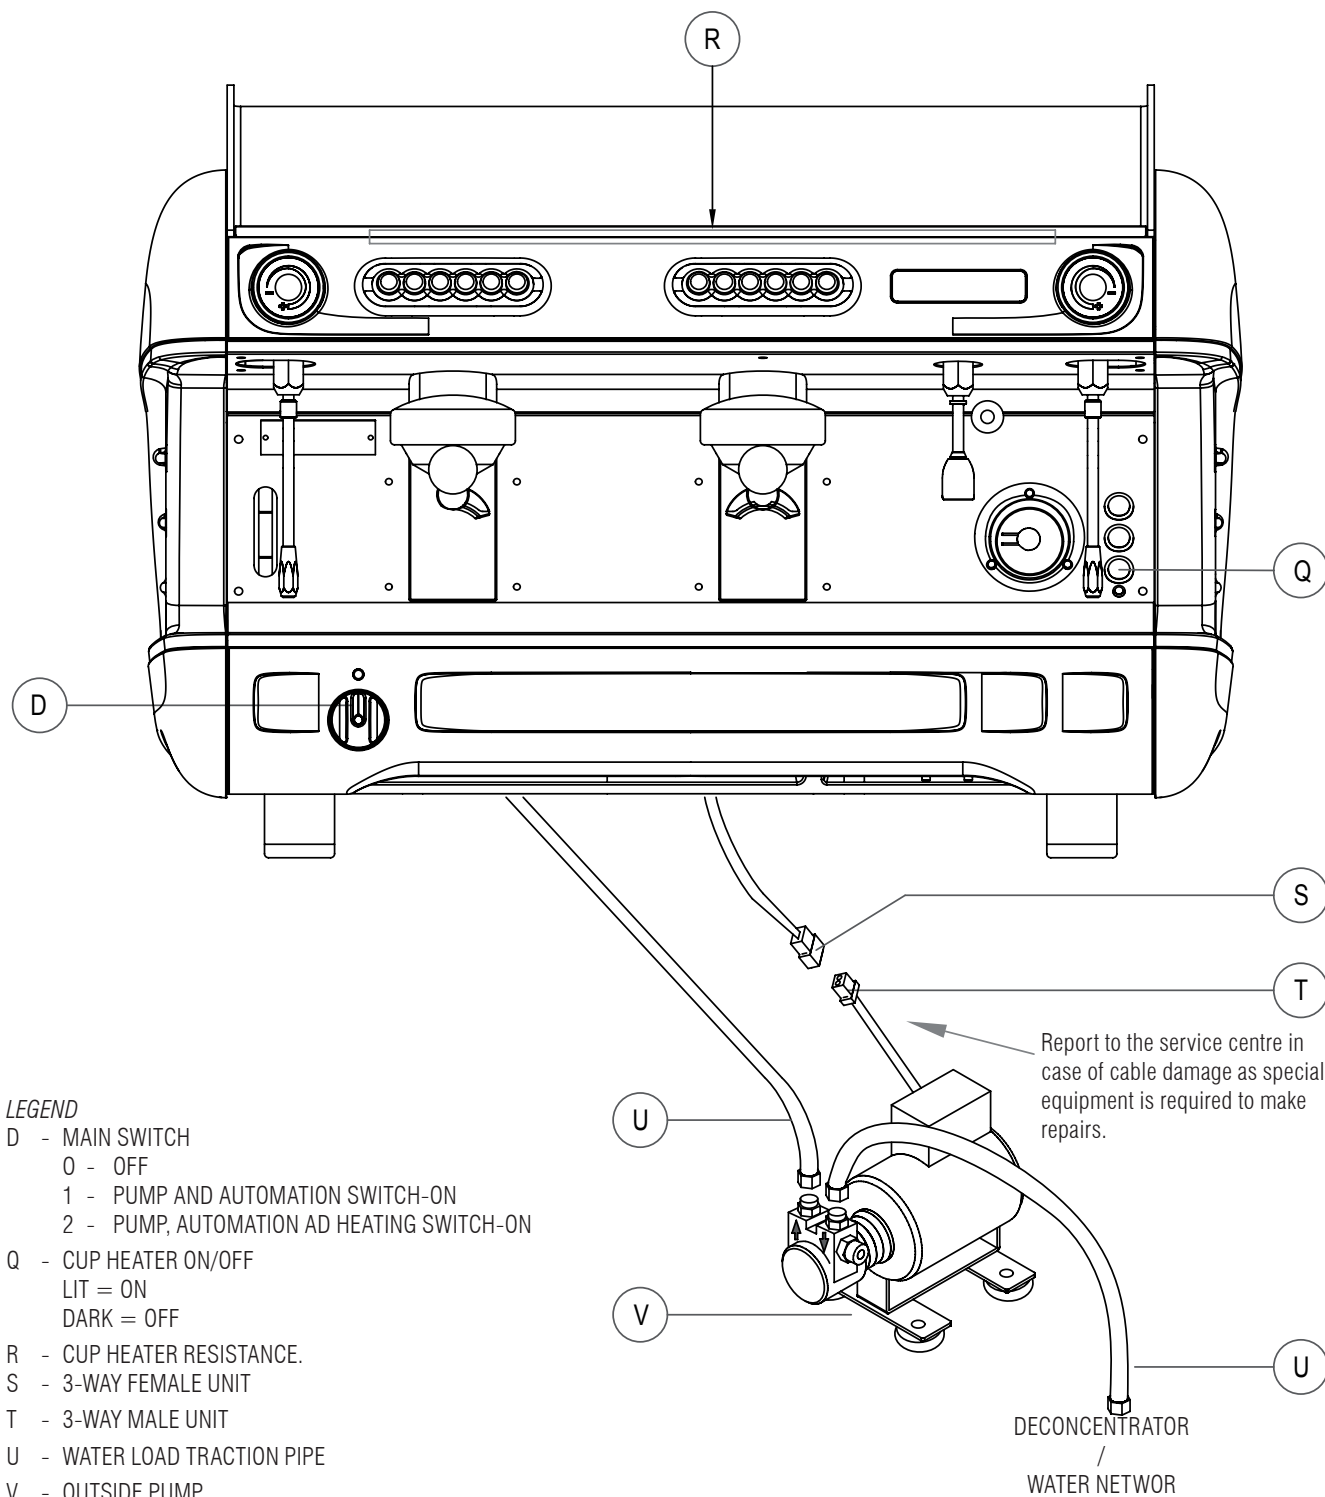

Place outside pump firmly on its feet.

Do not place the pump in the vicinity of heat or water.


Warning – correct use of rotary pumps

1-Proper Alignment of Pump and Motor

On occasion the noise of a motor-pump assembly is caused by a poor alignment.

When the coupling between motor and pump is rigid, the pump rotor and the motor rotor may be out of axis. If this condition is maintained over time the most likely damage is seizure of the pump.

An efficient solution of this problem is the use of an elastic coupling between pump and motor. Fluid-o Tech supplies an optional kit code N. 10051020.

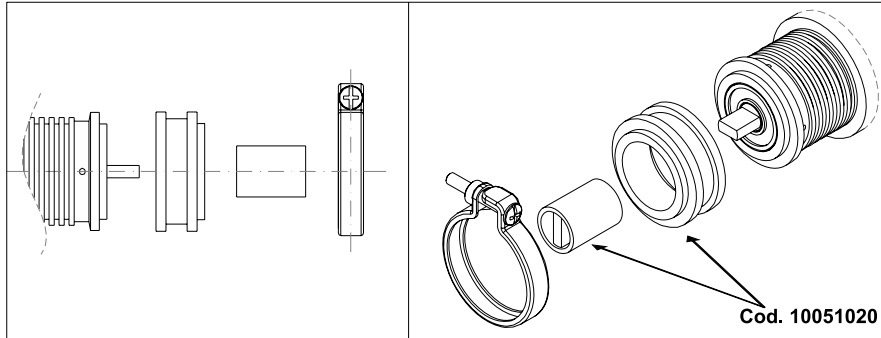

2-Quality of Water.

Tight mechanical tolerances of components and materials used for rotary vane pumps require a very clean water, free from suspended particles. Sand, deposits on connecting pipes or the resins of the sweetener, when flowing through the pump, may scratch graphite parts causing problems of insufficient pressure and flow rate.

If a closed loop hydraulic circuit is not available to guarantee a clean water and no sources of contamination Fluid-o-Tech recommend to install a 5-10 micron filter between the sweetener and the pump.

Recommended filter: food approved polypropylene wire cartridge.

Keep the filter clean.: an upstream dirty filter will create cavitation and the pump will break shortly (see section 4).

3-Dry operation

Rotary vane pumps may operate in dry condition only for a very short time- few seconds!

Without a proper water cooling the temperature of the mechanical seal will increase very quickly with resulting breakage. The most likely impact is a remarkable leak visible from the four drain holes close to the motor clamp. For potential lack of feed from city water line Fluid-o-Tech recommend the installation of a minimum pressure safety switch upstream from the pump.

In case of feed from a tank install on the tank a minimum level switch.

4-Cavitation

Cavitation shows when feed flow rate does not match the pump design requirement: most frequent causes are dirty filters, small diameter pipes, more users on the same line.

Opening of the safety valve (generally installed upstream from pump and filter) must happen

before the pump start up. This will avoid cavitation. For the same reason closing of the safety valve must be delayed after the pump shut down.

The most noticeable effect is an increase of noise. If cavitation continues the impact is the same as of dry operation.

5-Back Feed of Hot Water

If a non return valve between the pump and the hot water vessel is defective the pump may come in contact with hot water(90-100°C). Dimensional variations of components will cause seizure of the pump.

6) Wrong connections

Pumps connectors are 3/8" NPT(conical) or 3/8" GAS(cylindrical).

Connectors with thread different from the recommended type are occasionally used. Sealing is made with a glue or with teflon tape. If the connector is forced it is possible to create beards; if excess sealing glue is used the extra quantity of glue may enter into the pump body.

In both cases it is likely to create a damage.

7) Pressure strokes

To avoid pressure strokes opening of solenoid valves installed downstream must happen before the start of the pump. For the same reason closing of the valve must be delayed after stopping of the pump.

A pressure stroke may break graphite parts and damage mechanical seal causing blockage of the pump and leaks.

8) Handling

A crash on the floor may create deformations that will jeopardize the tight mechanical tolerances of the pump components. For the same reason be very careful when clamping the pump to mount or demount connectors.

9) Scale build up

Scale deposits will quickly show on inner components when using hard water, not sweetened with ion exchange resins.

Scale formation increases when the pressure relief valve is used as flow rate regulator: the rate of scale deposition increases with increasing of closed loop circulation.

Scale deposits cause an increase of torque, occasional seizure of the pump or a reduction of operating pressure because the pressure relief valve cannot work properly.

To minimize this problem Fluid-o-Tech suggest to use pumps with flow rate matching the hydraulic circuit features.

In some circuits it is advisable to periodically remove scale with a chemical treatment.

PROGRAMMING OF THE 3DS MAESTRO DE LUX CONTROL UNIT (ROMA TCS SED)

USER INTERFACE

BUTTONS

K1GR1, K1GR2, K1GR3:	Button supplying 1st dose of coffee	Group 1, 2, 3
K2GR1, K2GR2, K2GR3:	Button supplying 2nd dose of coffee	Group 1, 2, 3
K3GR1, K3GR2, K3GR3:	Button supplying 3rd dose of coffee	Group 1, 2, 3
K4GR1, K4GR2, K4GR3:	Button supplying 4th dose of coffee	Group 1, 2, 3
K5GR1, K5GR2, K5GR3:	Continuous / programming button	Group 1, 2, 3
K6GR1, K6GR2, K6GR3:	Button supplying dose of tea/steam	Group 1, 2, 3

Note: as will be better specified in the respective paragraph, some buttons belonging to the keyboard of group 1 perform specific functions (other than supplying) when programming is being carried out:

BUTTON	ADDITIONAL FUNCTION	FUNCTION DESCRIPTION
K1GR1	+ (PLUS)	Function of "increasing" the numerical values or selecting the "predetermined" options related to the parameter to be programmed
K2GR1	- (MINUS)	Function of "decreasing" the numerical values or selecting the "predetermined" options related to the parameter to be programmed
K3GR1	ENTER	Function of confirming some operations during programming
K5GR1	MENU	Function of selecting / choosing the parameter that is to be programmed

LED

L1GR1, L1GR2, L1GR3:	Led for 1st dose of coffee	Group 1, 2, 3
L2GR1, L2GR2, L2GR3:	Led for 2nd dose of coffee	Group 1, 2, 3
L3GR1, L3GR2, L3GR3:	Led for 3rd dose of coffee	Group 1, 2, 3
L4GR1, L4GR2, L4GR3:	Led for 4th dose of coffee	Group 1, 2, 3
L5GR1, L5GR2, L5GR3:	Continuous / programming led	Group 1, 2, 3
L6GR1, L6GR2, L6GR3:	Led for dose of tea/steam	Group 1, 2, 3

DISPLAY


LCD: Display LCD 16 characters x 2 lines

CONNECTION

The connection with the external keyboard(s) is made by means of a 16-way flat band cable (8x2ways), the length of which will depend on the position of the keyboards.

EXAMPLE OF BUTTON LAYOUT

NOTE: the graphics used in this document to represent the keyboards is purely indicative, supplied purely as an example.

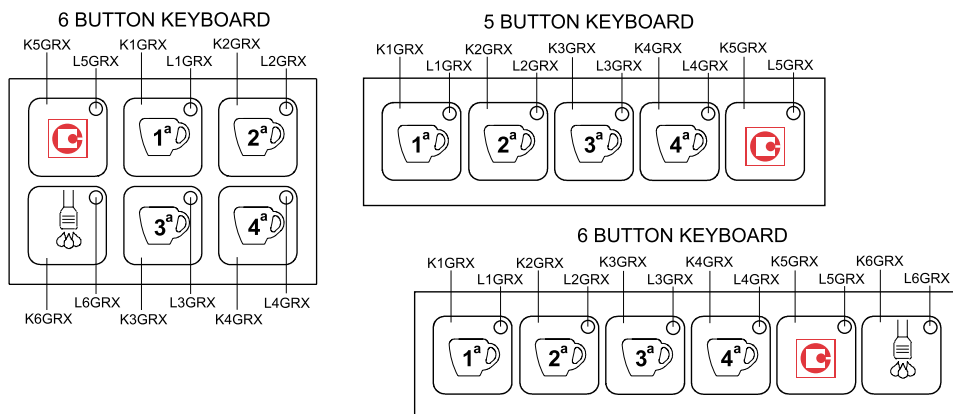

INPUTS

OUTPUTS

INPUTS / OUTPUTS

CV1: group 1 flow meter input **CV2:** group 2 flow meter input **CV3:** group 3 flow meter input

LOW VOLTAGE ANALOG INPUTS

- STCAF:** boiler temperature probe input
STLVAP: steam spout temperature probe input
SLIV: boiler level probe input
SLIVMIN: boiler minimum level probe input

LOW VOLTAGE OUTPUTS (low voltage)

- RISCAF:** low voltage output for triac or boiler heating element static relay (PID)

RS232 SERIAL LINE (low voltage)

- TxD/RxD:** signals for RS232 serial transmission (TTL)

MICROPROCESSOR PROGRAMMING LINE (low voltage)

- FLASH:** signals for “on-board” programming of the Flash processor (for Gicar use)

HIGH VOLTAGE OUTPUTS (8 RELAYS)

- PUMP:** Pump relay output
EV1: group 1 supply solenoid valve relay output
EV2: group 2 supply solenoid valve relay output
EV3: group 3 supply solenoid valve relay output
EVLIV: filling solenoid valve relay output
EVTEA: tea solenoid valve relay output
ON/OFF: general contactor (on/off) relay output or output for heating remote control switch (not PID)
EVVAP: steam solenoid valve relay output

POWER SUPPLY (high voltage)

The doser is supplied with the rated mains voltage through the connector provided.

CONNECTIONS

see “Electrical Characteristics”.

SWITCHING ON THE DOSER

When the doser is fed by means of the external main switch, it resumes the “OFF” or “IDLE-ON” status that it presented before being disconnected from the mains (see “Procedures in the event of a power cut”).

At the time of switching on the doser, the display briefly shows the version of the software installed (x.yy).

the display shows:



3D5 DE LUXE
REV.X.YY

OFF STATUS (DOSER OFF BUT SUPPLIED)

With doser switched off:

- all the outputs are deactivated
- all the functions are disabled, except those of Programming the TECHNICAL LEVEL

the display shows:



OFF hh:mm

where hh:mm INDICATE the present hour and minutes

IDLE ON STATUS (ON)


SWITCHING ON

To switch on the doser, press the button K3GR1.

In idle-on status, the doser detects the status of the level and minimum level probes (the latter only if used); if the probe detects lack of water in the boiler, the order is given to fill the boiler by activating the filling solenoid valve **EVLIV** and the **PUMP** until the correct water level is restored (Filling time-out - see ALARMS paragraph).

When filling is completed, heating is activated (see paragraph “boiler heating”).

If correct levels are found, or after the levels have been topped up, the doser enables or programmes the selections of coffee doses (see following paragraphs).



Enabling distribution is not subordinate to reaching set-point temperature in the boiler.



IN IDLE-ON STATUS ALL THE LEDS ARE LIT

the display shows:



where


hh = present hour (0 ÷ 23)

mm = present minute

GICAR srl = customer name desired

SWITCHING OFF

To switch off the doser, hold down first the key **K5GR1** and then immediately the key **K3GR1**.

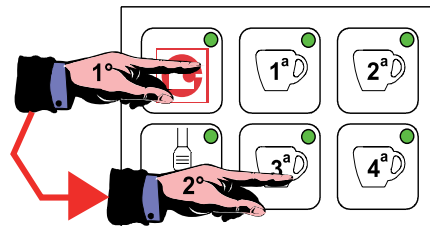


DISTRIBUTION

COFFEE CYCLE

DISTRIBUTION

From idle-on state, the six LEDs L1-L6 in the three groups are in the ON state. Pressing one of the four dose buttons belonging to the group from which you want to distribute the dose (for example K1GRx), both the distributing solenoid valve EVx and the PUMP will be energised, launching the distributing phase. The pump and the solenoid valve will remain activated until the previously programmed quantity of product (flow meter impulses) is reached. The LED corresponding to the button of the chosen dose remains lit throughout coffee distribution, while the others are in the OFF state.

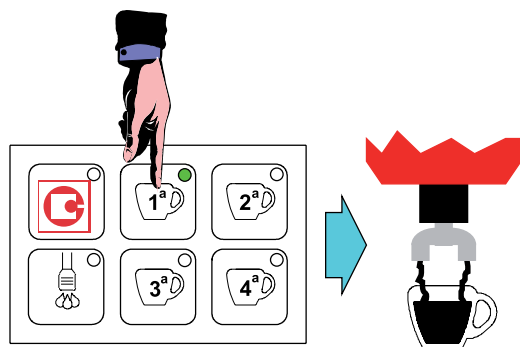

START DISTRIBUTION


the display shows:



During distribution the display indicates the dose given (English version)

- 1 Espresso
- 2 Espresos
- 1 Coffee
- 2 Coffees
- Continuos
- Tea
- Steam

NOTE: If keypad 6T/12L is used, as well as normal management of the LED corresponding to the dose requested (see above), the 6 LEDs on the keypad (L7GRX - L12GRX) will switch on sequentially to indicate the duration of the dose being distributed. From the moment the request for distribution is given and the distribution solenoid valve EVx and PUMP are energised, LEDs L7GRX, L8GRX, L9GRX, L10GRX, L11GRX and L12GRX will switch on in sequence. At the same time as L12GRX comes on, the dose is distributed, the system de-energises the solenoid valve EVx and the PUMP and the LED corresponding to the dose concerned goes off. At the end of distribution of a dose, LEDs L7GRX - L12GRX will remain ON (unless there is a further request for distribution in the meantime) for about 10", after which they will all switch OFF.

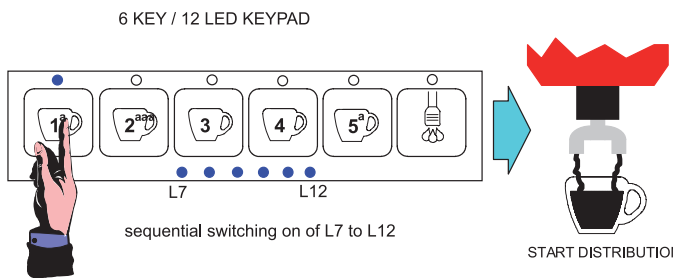


START DISTRIBUTION

STOP COFFEE DISTRIBUTION IN PROGRESS

It is possible to interrupt the distribution in progress before reaching the programmed impulses on the flow meter by pressing any one of the dose buttons on the keyboard of the group used for distributing the product.


This operation immediately de-energizes both the distribution solenoid valve EVx and the PUMP, interrupting the distribution of the product and returning the doser to idle-on status. All LEDs on the keypad are in the ON state.

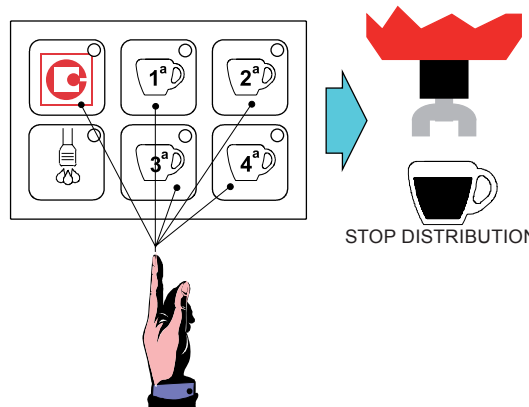

STOP DISTRIBUTION

NOTE: As well as normal management of STOP DISTRIBUTION (see above), the 6T/12L

keypad also provides management of the “DOSE LEVEL” LEDs on the keypad (L7GRX - L12GRX). Once the dose underway is stopped as described in the previous paragraph, these will remain in the same “dose level” state as before the STOP distribution for a period of about 10”, after which they will switch OFF.

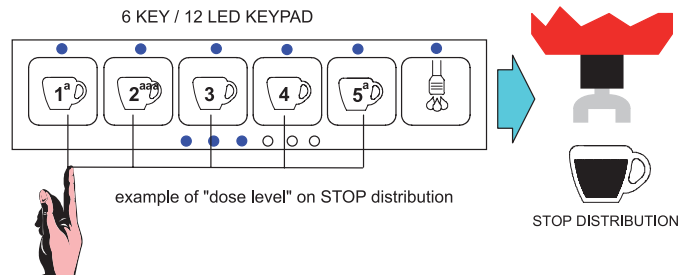


PRE-BREWING

The 3d5 MAESTRO DELUXE doser may be configured in such a way that the distribution of coffee doses with volumetric control is preceded by pre-brewing. When dosing starts, the group solenoid valve EVx switches off after the time t1 (on) and remains off for the time t2 (off); it is then re-energised to complete the dose as programmed. This timed on/off does not involve the PUMP actuator.

When one of the dose buttons with volumetric control is pressed, the “normal” distribution cycle is preceded by a short timed jet of water used to moisten the coffee capsule before moving on to the actual distribution.

ATTENTION: the times t1(on) and t2(off) can be set in the TECHNICAL LEVEL Programming for all coffee doses. If a zero value is assigned to one or more quantities, this function, though active, is not performed!


To enable, see TECHNICAL LEVEL Programming.

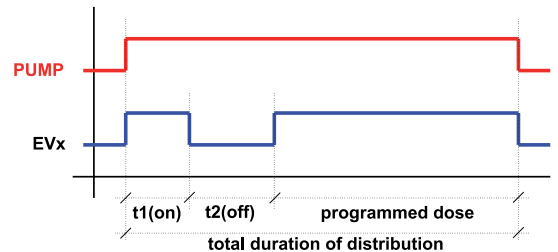

COFFEE DISTRIBUTION IN CONTINUOUS MODE

From idle status, pressing one of the dose buttons K5GRx (continuous/programming), both the distribution solenoid valve EVx and the PUMP are activated, starting the distribution phase. The LED L5GRx for the button of the chosen dose remains lit during the whole distribution of coffee.


the display shows:

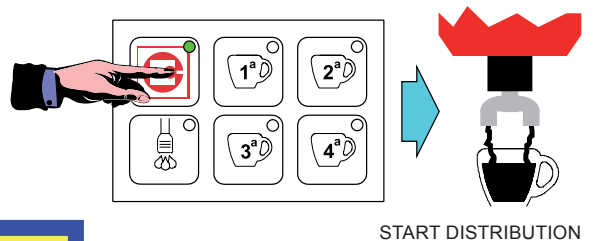

To interrupt distribution in continuous mode, STOP the dose by pressing any dose button on the keyboard used for distributing the product. This de-energizes the solenoid valve and pump, and consequently the warning led switches off.

Distribution in continuous mode is stopped automatically (if no stop command is given) when the maximum product quantity is reached; this quantity may be controlled both volumetrically when 6000 impulses are reached and by means of a distribution time-out (see ALARMS paragraph).

IMPORTANT: THE “CONTINUOUS” CYCLE IS STARTED WHEN THE BUTTON K5GRx IS RELEASED (WITHIN 5 SECONDS, OTHERWISE THE PROGRAMMING PHASE BEGINS) AND NOT WHEN IT IS PRESSED. INSTEAD THE STOP DOSE OCCURS WHEN THE BUTTON IS PRESSED.

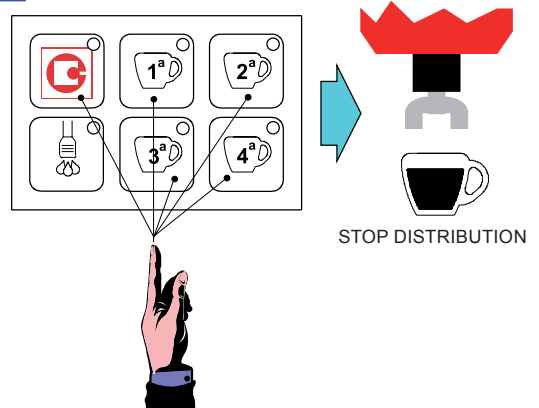


TEA CYCLE DISTRIBUTION

When the button for the Tea dose (K6GRx) is pressed the tea solenoid valve (EVTEA) is activated, starting the distribution of hot water. The operation is indicated by the lighting of the LED (L6GRx) corresponding to the button pressed.

At the time of starting the cycle a Timer is activated which stops product distribution once the time value set during programming is reached.


The doser allows simultaneous distribution of both the tea and the coffee cycles.

the display shows:

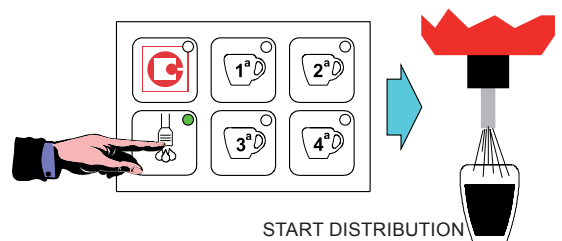

Stop tea distribution in progress

It is possible to interrupt the distribution in progress before reaching the programmed time by pressing the same button used to start the distribution of the dose of tea. This operation immediately de-energizes the solenoid valve EVTEA, interrupting the

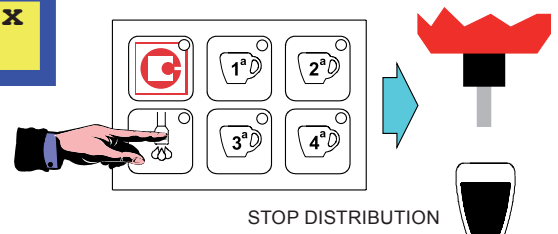

distribution of the product and returning the doser to idle-on status.

ATTENTION: THE 3d5 MAESTRO DELUXE DOSER CONTEMPLATES THREE DIFFERENT TEA DOSES (ONE FOR EACH GROUP).

TEA + PUMP

It is possible to combine the distribution of tea with the pump. See TECHNICAL LEVEL Programming.

STEAM SPOUT DISTRIBUTION CYCLE



This function and the keyboard for performing it can be activated in the TECHNICAL LEVEL Programming (see paragraph).

Steam is enabled only with the doser lit and when the minimum level has been reached (probe SLIVMIN covered).

Only at the time of switching on does the doser wait for the boiler to be completely filled. The temperature of the liquid heated by the steam is measured by means of a temperature probe positioned on the steam spout and connected to the STLVAP input.

When the button **K4GRx** is pressed the solenoid valve **EVVAP** is energised until the temperature set in Programming for Simulation is reached (see paragraph below).

the display shows:

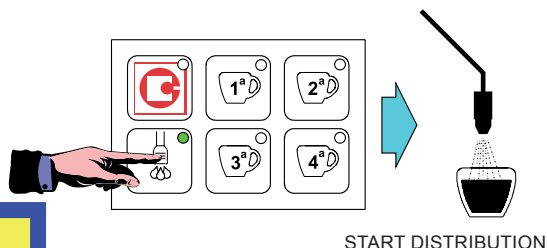

However it may be interrupted in advance by pressing the steam button again.

Once the programmed temperature has been reached, it is possible to continue distributing steam by holding down the steam button.

If the temperature is not reached within 120 seconds, steam distribution is ended automatically.



The system allows the simultaneous distribution of coffee, tea and steam.

In case of simultaneous operation of two or more of the above, the display shows the respective messages alternately.

DISTRIBUTION FROM STEAM WAND CYCLE (IF MANAGED BY SLAVE BOARD)

This function and the keyboard for performing it can be activated in the TECHNICAL LEVEL Programming (see paragraph). Steam is enabled only with the doser lit and when the minimum level has been reached (probe SLIVMIN covered). The doser waits for the boiler to be completely filled at the moment of switching on only. The temperature of the liquid heated by the steam is measured by means of a temperature probe positioned on the steam wand and connected to the STLVAP input. When the button **K6GRx** is pressed the solenoid valve **EVVAP** is activated until the temperature set in Programming for Simulation is reached (see paragraph below).

the display shows:

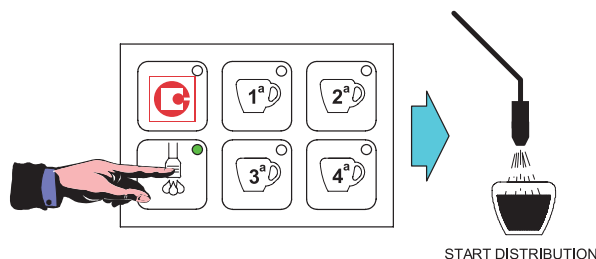

However it may be interrupted in advance by pressing the steam button again.

Once the programmed temperature has been reached, it is possible to continue distributing steam by holding down the steam button. Once steam dosing is complete, steam wand washing commences automatically (for the washing time given in the paragraph TECHNICAL LEVEL PROGRAMMING).

If the temperature is not reached within 120 seconds, steam distribution is ended automatically. The system allows the simultaneous distribution of coffee, tea and steam. In the event of simultaneous distribution, the selections are displayed in succession from the first to the last.

STOP STEAM DISTRIBUTION IN PROGRESS

It is possible to interrupt the distribution in progress even when the programmed temperature has not been reached by re-pressing the same button as used to start distribution of the dose of steam. This operation immediately de-energises the solenoid valve **EVVAP**, interrupting distribution of the steam and returning the doser to idle-on state.

LEVEL MANAGEMENT AND REGULATION

MINIMUM LEVEL PROBE

At Power-on, the doser detects the status of the minimum level probe. If there is no water, the **ON/OFF** control (which the customer will have connected as he prefers to the heating resistance remote control switch or other actuator) is kept de-energised to protect the heating resistance against dry operation.

NOTE: When the system is switched on, the control of the minimum level probe is enabled after about 6 seconds.

Whenever the minimum level probe in the boiler does not detect the presence of liquid for 3 seconds, the **ON/OFF** switch is de-energised to protect the heating element and this is shown on the display.

the display shows:



When the minimum level probe again detects the presence of water for 3 consecutive seconds, the **ON/OFF** actuator is re-enabled and consequently the heating, and the alarm disappears from the display.

Note: the minimum level probe does not control or manage filling, as this function is performed by the level probe.

CHRONO FUNCTION

The CHRONO function can be activated in the TECHNICAL LEVEL Programming (see paragraph). It enables the time of coffee distribution to be displayed in seconds for the respective groups. As soon as a dose is activated, the following is displayed:

the display shows:



Where

- XXX is the drink selected
- ZZZ are the seconds which increase even when the flow meter receives no pulses.

This is displayed for 5 seconds from the end of the last distribution, after which IDLE-ON is again displayed.

In the event of simultaneous distribution, the selections are displayed in succession from the first to the last.

In the event of a flow meter alarm, the alarm is displayed until interruption of the dose by the user (or due to flow meter time-out), after which the duration of the dose is displayed for 5 seconds.

DISABLING TEMPERATURE DISPLAY

The TEMPERATURE DISABLING function can be activated in the TECHNICAL LEVEL Programming (see paragraph). It disables display of the temperature measured by the boiler temperature probe.

the display shows:




Where the message ON identifies activation of the heating remote switch ON/OFF relay by the user.


DISTRIBUTION GROUPS WASHING

To activate the DISTRIBUTION GROUPS WASHING CYCLE, with the doser in IDLE-ON state, just press the continuous button (K5GRx) and then the first dose button (K1GRx) corresponding to the group you want to wash. LEDs L5GRx and L1GRx corresponding to the group concerned start flashing to confirm that the washing cycle is underway.

Washing is performed by energising the EVx actuators (where X may be 1, 2 or 3 corresponding to the group being washed) and PUMP actuators according to the times shown below.

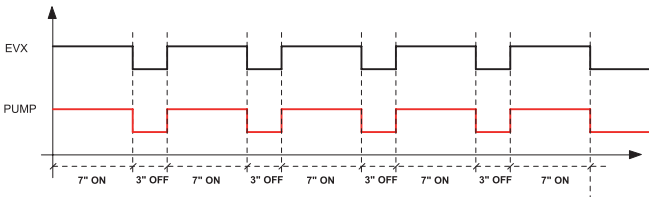

END WASHING CYCLE

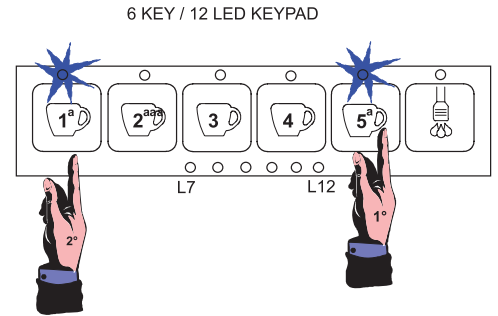

The cycle consists of energising of the PUMP and EVx actuators for 7 seconds, followed by de-energising for a further 3 seconds. This is repeated 5 times. At the end of a washing cycle, the system automatically switches back to the IDLE-ON state.


NOTE: washing may be performed as many times as you wish and simultaneously on three groups.

NOTE1: you can interrupt the washing cycle before conclusion by pressing any distribution button for the group concerned.


STEAM WAND/CAPPUCCINO MAKER WASHING (IF PRESENT ON THE SLAVE BOARD)

To activate the STEAM WAND/CAPPUCCINO MAKER WASHING CYCLE, with the doser in IDLE-ON state, just press button K5GRx then the button (K1GRx) corresponding to the group on which the steam is active. The L6GRx LED corresponding to the group concerned remains lit to confirm that the washing cycle is underway. The other LEDs in the group switch off.

Washing is performed by energising the EVVAP and EVLAV actuators according to the times shown below.

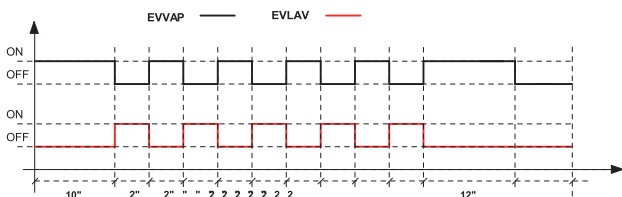

END WASHING CYCLE

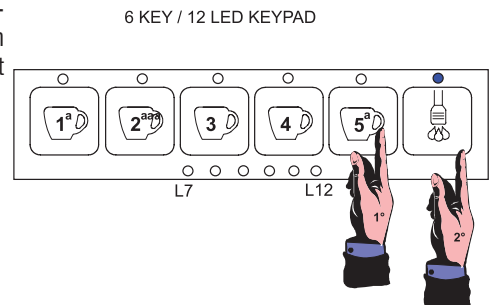

The cycle consists of energising EVVAP for 10 seconds, then alternating EVLAV for 2 seconds and EVVAP for 2 seconds. This is repeated 5 times. At the end, EVVAP remains energised for 12 seconds. At the end of a washing cycle, the system automatically switches back to the IDLE-ON state.

NOTE: you can interrupt the washing cycle before conclusion by pressing any distribution button for the group concerned.

NOTE1: you can distribute coffee and tea from all groups during steam wand washing.



LEVEL PROBE

At Power-on, the doser detects the status of the level probe in the boiler and, if necessary (lack of water), it orders the filling phase by energising the filling solenoid valve **EVLIV** and the **PUMP** until the correct level of water is restored in the boiler.

(Time-out contemplated in the programmable filling phase - see TECHNICAL LEVEL Programming)

NOTE: When the system is switched on, the level control and regulation are enabled after about 6 seconds.

Whenever the level probe in the boiler does not detect the presence of liquid for 3 seconds, the filling phase is activated by energising the filling solenoid valve **EVLIV** and the **PUMP**. When the probe again detects the presence of water for 3 consecutive seconds, the filling phase is interrupted by de-energising the filling solenoid valve **EVLIV** and the **PUMP**.

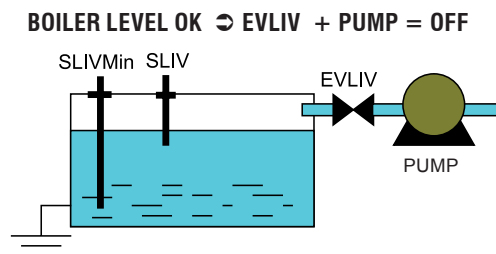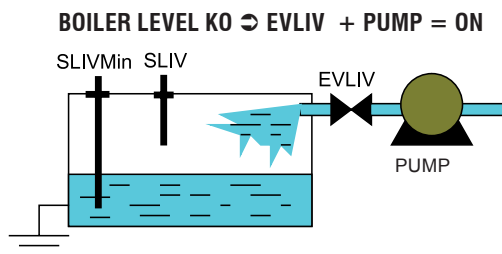

The filling phase does not influence the possibility of both making coffee or tea selections and their new programming. Only the intervention of the Time-out associated with the filling phase inhibits the functionality of the keyboard and of the actuators.

At the first regulation of the water level in the boiler, the system waits for the level probe to be covered before activating the **ON/OFF** relay.

It is possible to vary the sensitivity of the level probes by means of a parameter in the TECHNICAL LEVEL Programming which offers the following possibilities:

- | | | |
|------------------------------|--------------|---|
| -> LOW sensitivity | 150kΩ | for example in the presence of a water softener |
| -> MEDIUM sensitivity | 400kΩ | normal water |
| -> HIGH sensitivity | 1MΩ | for example in the case of mountain water or of a sight glass |

COFFEE BOILER HEATING

CHARACTERISTICS

The heating control is enabled for dosing in IDLE-ON status and uses a temperature probe and a control for the low voltage resistance.

At the first regulation the heating is activate only AFTER the level has been reached in the boiler, to protect the resistance.

In all other cases the heating is active if necessary except when the minimum level probe is uncovered; in this condition, heating is blocked immediately.

REGULATING MODES

Control may be exerted in 2 modes.

WITH ON/OFF REGULATION WITH 2°C HYSTERESIS

Temperature regulation is realised with a hysteresis of 2°C. The resistance is controlled by the ON/OFF relay which is de-energised when the programmed temperature T°SET is reached (see TECHNICAL LEVEL Programming) and it is re-energised when the temperature falls by 2°C. A timed filter is also fitted to avoid vibrations on the threshold of intervention.

To activate this function it is necessary to set **all the pid constants at 0** in the TECHNICAL PROGRAMMING (see specific paragraph).


WITH PID REGULATION (DEFAULT SETTING)

The temperature regulation is carried out following a proportional, integrative and derivative algorithm. (see TECHNICAL LEVEL Programming for the setting of the parameters)

The heating control is enabled for dosing in IDLE-ON status and uses a temperature probe and a RISCALF low voltage control for Triac or solid state relays with PID function.

The temperature regulation is carried out following an algorithm that uses 3 constants:

- proportional (kp)
- integrative (ki)
- derivative (kd)

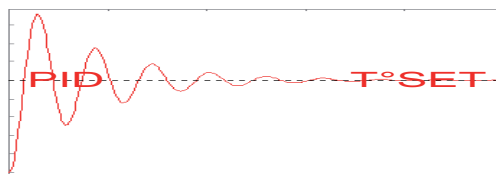

The three constants must be adapted to every type of coffee doser according to the power characteristics of the resistance, the dimensions of the boiler, its heat loss, etc.

The "set point value or T°SET" is the temperature that the boiler must be at during normal operation.

- If the temperature swings excessively around the T°SET in the heating or holding phase, with peaks of value that do not diminish over time, it is necessary to decrease the proportional constant: Kp
- If the temperature swings excessively around the T°SET in the holding phase, with a very long period of oscillation and with peaks of value that do not diminish over time, it is necessary to decrease the proportional integrative constant: Ki
- If the temperature has an excessive oscillation and is often larger than the T°SET during the heating or holding phase, but it attenuates as time passes, it is necessary to decrease the derivative constant: Kd
- If the temperature tends to be below the T°SET value during the heating phase, getting farther away from it, it is necessary to increase the derivative constant: Kd
- If the temperature tends to be constantly below the T°SET value during the heating phase, it is necessary to increase the proportional constant:

Kp and also slightly increase the integrative constant: Ki

- If the temperature tends to be constantly below or above the T°SET value during the holding phase, it is necessary to increase the integrative constant: Ki and also slightly increase the proportional constant: Kp
- Si pendant la phase de maintien la température tend à se maintenir au-dessous ou au-dessus de la valeur de T°SET de façon constante, il faut augmenter la constante intégrale: Ki et augmenter légèrement également la constante proportionnelle : Kp


PROGRAMMING AND READINGS

PROGRAMMING COFFEE DOSES


It is possible to modify and memorise the quantities for volumetric coffee doses following the procedure described below

1) In IDLE-ON status press the button **K5GRx (1..3)** and hold it down for longer than 5 seconds; check that the led **L5GRx (1..3)** changes from fixed to flashing.



the display shows:



2) Within **10 seconds** (time-out for leaving the programming phase) press any one of the buttons associated with the 4 doses that can be programmed (for example **K1GRx**). The LED for the button **K5GRx** remains lit as does that of the dose being programmed (in our example **L1GRx**). The **EVx + PUMP** actuators are enabled for the whole duration of coffee dose programming.

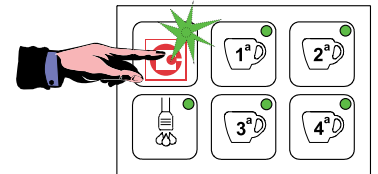


3) When the coffee quantity at which you want to programme the dose is reached, press any one of the “coffee” buttons on the keyboard of the group being programmed

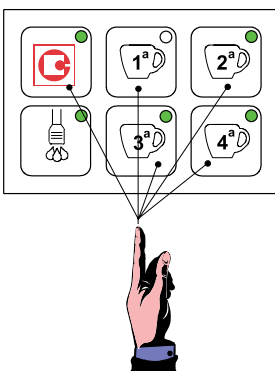

STOP DISTRIBUTION

to interrupt the distribution of the product with the consequent de-energising of **EVx + PUMP**. The new value of the dose, expressed in impulses of the flow meter, is memorised in the EEPROM.

At the same time the led for the programmed dose switches off and the remaining leds switch on; it is then possible to programme the remaining doses (also tea and steam doses if enabled) without having to repeat the input operation (see point 1).

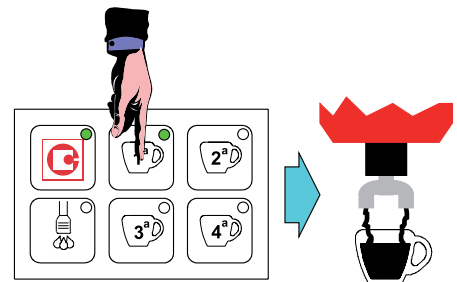

START DISTRIBUTION

EVx + PUMP = OFF

- To programme the remaining coffee doses (if the programming time-out of 30 seconds has not been exceeded), repeat points (2) and (3) in sequence.
- If the programming time-out (30 seconds) has intervened, to proceed with programming you must repeat the entire sequence described in points (1), (2) and (3).
- The leds for the doses “already programmed” are off if you decide to return to programming. However this does not prevent a “new” programming of the doses already programmed (this condition cannot occur if a dosing ON/OFF operation has been performed after programming).

IMPORTANT: the programming carried out on the FIRST GROUP is ALWAYS automatically transferred to all the other groups too. However this does not affect the possibility of programming the remaining groups independently of the first by means of the operations described in points (1), (2) and (3).

ATTENTION: IF THE “PRE-BREWING” FUNCTION IS ACTIVE (SEE SPECIFIC PARAGRAPHS), THE DOSER CURRENTLY BEING PROGRAMMED ALWAYS ENABLES THIS PARTICULAR FUNCTION. SO WAIT UNTIL IT IS ENDED BEFORE STOPPING THE DISTRIBUTION IN PROGRESS.

NOTE: during programming of one group the other groups remain disabled, as well as the distribution of tea and steam if enabled.

IF A COFFEE DOSE DOES NOT WORK...

Solving possible problems:


if after programming of a volumetric dose, this dose is not given, it is possible that the doser, for some reason, has not received the impulses from the flow meter and has therefore programmed a dose of 0 impulses.

Possible causes to check: flow meter incorrectly connected, flow meter exchanged with that of another group, water circuit not operating.

PROGRAMMING CONTINUOUS/3COFFEES DOSE

The continuous dose button can also be programmed on the K5GRx buttons. The programming procedure is the same as for the other 4 doses on each keypad explained previously. During programming, the following is displayed:

the display shows:




During programming, only the LED corresponding to the continuous/3coffee button being programmed remains lit.

PROGRAMMING TEA DOSES

It is possible to modify and memorise the quantities for tea doses (with timed control) following the procedure described below:

1) In IDLE-ON status press the button **K5GRx (1..3)** and hold it down for longer than 5 seconds; check that the led **L5GRx (1..3)** changes from fixed to flashing.

the display shows:

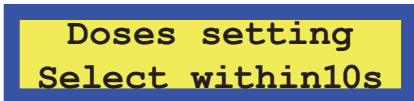

Doses setting
Select within10s

2) Within **10 seconds** (time-out for leaving the programming phase) press the button **K6GRx** associated with the tea dose. The led for the button **K5GRx** remains lit.

The actuator **EVTEA** is enabled for the whole duration of programming the tea dose.

3) When the tea quantity at which you want to programme the dose is reached, press again the button **K6GRx** used previously to interrupt the distribution of the product with consequent de-energising of **EVTEA**.

The new time for the duration of the tea dose is memorised.

- **To programme the remaining tea doses (if the programming time-out of 30 seconds has not been exceeded and you have not entered programming from group 1 by pressing the button K5GR1), repeat points (2) and (3) in sequence.**
- **If the programming time-out (30 seconds) has intervened, to proceed with programming you must repeat the entire sequence described in points (1), (2) and (3).**
- **The leds for the doses “already programmed” are off if you decide to return to programming. However this does not prevent a “new” programming of the doses already programmed (this condition cannot occur if a dosing ON/OFF operation has been performed after programming).**

IMPORTANT: the programming of the tea dose carried out on the FIRST GROUP is NEVER automatically transferred to all the other groups too. To programme the tea dose on the remaining groups it is sufficient to repeat the operations described in points (1), (2) and (3).


NOTE: during programming of one tea, the groups and the distribution of other teas remain disabled.

PROGRAMMING STEAM TEMPERATURE BY SIMULATION

It is possible to modify and memorise the temperature at which the **EVVAP** must be deactivated. The temperature may be programmed by simulation, following the procedure described below.

1) In IDLE-ON status press the button **K5GRx (1..3)** and hold it down for longer than 5 seconds; check that the led **L5GRx (1..3)** changes from fixed to flashing.

the display shows:

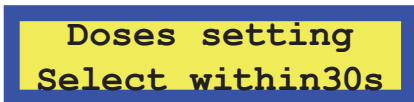

Doses setting
Select within30s

2) Within **30 seconds** (time-out for leaving the programming phase) press the button **K6GRx** associated with steam. The led for the button **K5GRx** remains lit.

The actuator **EVVAP** is enabled for the whole duration of programming.

3) When the desired temperature is reached (measured with an external probe or in another way chosen by **GICAR**), press again the button **K6GRx** used previously to interrupt the distribution of the product with consequent de-energising of **EVTEA**.


The new steam temperature value (steam spout) is memorised.

- **If the programming time-out (30 seconds) has intervened, to proceed with programming you must repeat the entire sequence described in points (1), (2) and (3).**

NOTE: during Steam programming the other groups are disabled.

PROGRAMMING THE CLOCK

With the display showing:

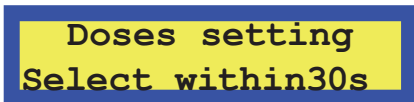

Doses setting
Select within30s

pressing the button **K5GRx (1 3)** again takes you to the clock adjustment

the display shows:



Clock adjust

press the button **K3GR1 (ENTER)** to confirm

the display shows:



Clock adjust
hh.mm XXXXXXXXXXXX

where: hh = present hour (0... 23)

mm = present minute

XXX = day of the week

If you want to modify the parameter you must press the buttons **K1GR1 (+)** or **K2GR1 (-)**, and confirm with **K5GR1**.

Pressing the button **K5GR1** again takes you to the setting of automatic switching on.

AUTO ON/OFF - AUTOMATIC SWITCHING ON/OFF

Allows you to define the times for automatically switching the doser on and off and the weekly closing day.

the display shows:

Auto ON/OFF
aaa : hh.mm

The following are programmed in this order:

- switch-on hour (AAA = On)
- switch-on minute (AAA = On)
- switch-off hour (AAA = Off)
- switch-off minute (AAA = Off)
- rest day

To pass from one to the other, press the button **K5GR1**. You can set 1 switch-on and 1 switch-off and these apply to every day of the week.

If you do not want automatic switching on or off, you must go to the programming of the corresponding time and press **K1GR1 (+)** or **K2GR1 (-)** until the display appears as follows:

the display shows:

Auto On/Off
On : --.--

or

the display shows:

Auto On/Off
Off : --.--

(pressing **K2GR1 (-)** when the display shows the hour 00 or pressing **K1GR1 (+)** when it indicates the hour 23).

In this case:

- if switch-on has been disabled, switch-off and the rest day are also automatically disabled; pressing **K5GR1** skips the respective settings and moves directly to the next parameter. Switching on and off can therefore be done only by hand with the procedure described in the previous paragraph.
- if switch-on is enabled, pressing **K5GR1** moves on to the setting of switch-off and then to the rest day, if necessary.

REST DAY

It is possible to define a weekly rest day, on which the doser ignores automatic switch-on and can be switched on only by hand.

Instead, automatic switch-off is active also on the rest day.

the display shows:

Closed On
xxxxxxxx

Using **K1GR1 (+)** or **K2GR1 (-)** select the day (XXX).

If you do not want to set a rest day you must select "-----".

It is possible to set only one rest day.

READING CONSUMPTION, LITRES, MAINTENANCE

With the display showing:

Clock adjust

pressing the button **K5GR1** again takes you to reading of the counts:

the display shows:

Counters

press the button **K3GR1 (ENTER)** to confirm

the display shows:

Litres
xxxxx

the litres used up to that moment are shown.

press the button **K5GR1** to move on to the number of cycles carried out up to that moment.

the display shows:

Service
xxxxx

press the button **K5GR1** and the total number of coffees distributed up to that moment is shown.

the display shows:

Coffees total
xxxxx

press the button **K5GR1** to review all the counts and the totals of the individual doses of each group are shown.

the display shows:



where y is the group zzzzz = is the type of coffee xxxxx = is the number of coffees
 At the end of the review, pressing the button **K5GR1** allows you to leave this phase.


TECHNICAL LEVEL PROGRAMMING

Entering the environment for TECHNICAL LEVEL Programming allows the programming of particular parameters or functions.

To access TECHNICAL LEVEL Programming, go into OFF status and hold down the button **K5GR1** for 10 consecutive seconds.


PRESS IN OFF STATUS FOR 10 SECONDS

Note: access to TECHNICAL LEVEL Programming and the programming operations can be carried out only from the keyboard for group 1.

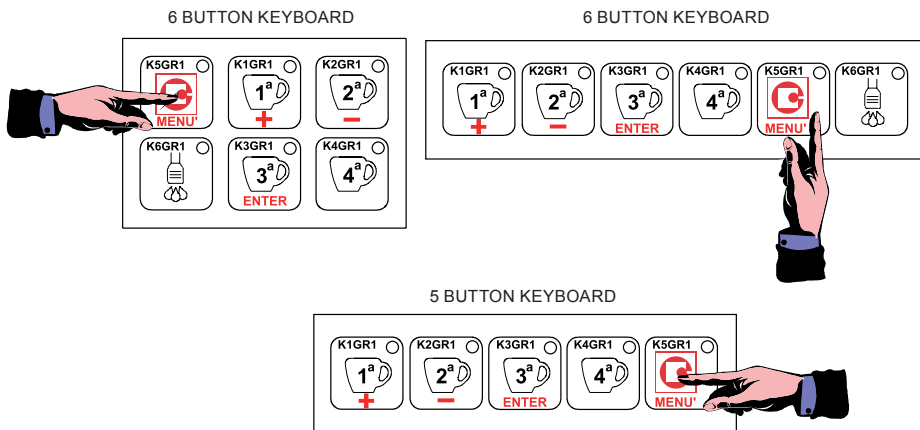

When TECHNICAL LEVEL Programming is accessed as described above, the first TECHNICAL parameter appears on the display, that is the set LANGUAGE:

the display shows:



where xxx = English, Italian, French, German, Spanish

If you want to modify the parameter displayed, it is necessary to use the buttons **K1GR1 (+)** or **K2GR1 (-)** to select the various options available; to move on to the display of the next parameter press **K5GR1 (MENU)**.

The USER NAME is displayed.

the display shows:



If you want to modify the parameter (message) use the buttons **K1GR1 (+)** or **K2GR1 (-)** to select the letters of the alphabet; when the letter/symbol/number under the blinking cursor is the one you want, press the button **K3GR1 (ENTER)** to confirm the letter/symbol/number and go on to select the next letter/symbol/number.


Arrangement of the characters available:

blank	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	0	1	2	3
4	5	6	7	8	9	:	;	<	=	>	?	@	A	B	C	D	E	F	G
H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	[
¥]	^	_	`	a	b	c	d	e	f	g	i	j	k	l	m	n	o	p
q	r	s	t	u	v	w	x	y	z										

To move on to the next menu press the button **K5GR1 (MENU)**.


The setting of a telephone number is shown; this number must be displayed in the case of certain alarms.

the display shows:



where xxx are the figures that make up the telephone number. After programming of the SERVICE PHONE, move on to the following parameter by pressing **K5GR1 (MENU)**. This takes you to setting of the CHRONO function.

the display shows:



Where XXX may be ENABLE/DISABLE:

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)** to select one or the other. When the CHRONO function is enabled, the time in seconds (increasing) corresponding to the dose being distributed is displayed.

After programming of the CHRONO function, move on to the following parameter by pressing **K5GR1 (MENU)**. This takes you to setting of the DISP. TEMPERAT. If enabled, this enables the temperature measured by the temperature probe to be displayed.

the display shows:




Where XXX may be ENABLE/DISABLE


where XXX are the numbers that make up the telephone number.

After having programmed the SERVICE PHONE, press K5GR1 (MENU) to move on to the next parameter; this takes you to the setting of the type of KEYBOARD used on the doser and it applies to all the keyboards used for the three groups.


the display shows:




Select "Esp - Caf - 2Es - 2Caf" when the keyboards used are of the type:



6 BUTTON KEYBOARD



5 BUTTON KEYBOARD




6 BUTTON KEYBOARD

Select "Esp - 2Es - Caf - 2Cof" (pressing the buttons K1GR1 "+" or K2GR1 "-") to display the preferred option) when the keyboards used are of the type:


the display shows:




After having set the type of keyboard, pressing the button K5GR1 (MENU) allows you to move on to the display where you can enable or disable the programming of the doses



6 BUTTON KEYBOARD




5 BUTTON KEYBOARD



6 BUTTON KEYBOARD

the display shows:




where xxx may be "DISABLE" or "ENABLE"

If you want to modify the parameter, press the buttons K1GR1 (+) or K2GR1 (-).

After having finished the setting, pressing the button K5GR1 (MENU) allows you to move on to the display where you can enable or disable continuous dose distribution.

the display shows:



where xxx may be "DISABLE" or "ENABLE"

If you want to modify the parameter, press the buttons K1GR1 (+) or K2GR1 (-).

After having finished the setting for enabling or disabling the "continuous" dose, pressing the button K5GR1 (MENU) allows you to move on to the display where you can choose to associate the pump with tea distribution.

the display shows:



where YY may be "NO" or "YES"

If you want to modify the parameter, press the buttons K1GR1 (+) or K2GR1 (-).

After having finished the setting for enabling or disabling tea with the pump, pressing the button K5GR1 (MENU) allows you to move on to the display where you can choose the function for setting the keyboard where the button K6Grx will command not tea but steam.

the display shows:




where x may be "0" or "1" or "2" or "3"

0 = disabled

If you want to modify the parameter, press the buttons K1GR1 (+) or K2GR1 (-).

After having finished the setting for choosing the keypad for the steam button, pressing the button K5GR1 (MENU) allows you to move on to the display for choosing the duration of steam wand washing.

the display shows:



where xxx is the duration of washing in seconds (from 0 seconds to 10 seconds; at 0 seconds, washing is disabled)

After having finished the setting corresponding to the duration of steam wand washing, pressing the button **K5GR1 (MENU)** allows you to move on to the display for choosing the PRE-BREWING function.

the display shows:



where xxx may be "DISABLE" or "ENABLE"

If you want to modify the parameter for enabling/disabling pre-brewing, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having enabled the pre-brewing function, pressing the button **K5GR1 (MENU)** allows you proceed to set the **ON** and **OFF** parameters.

The first programmable ON time is the one for the buttons **K1GR1**, **K1GR2**, **K1GR3** (in the graphic example of the display we refer to keyboards of the type Esp - Caf - 2Es - 2Caf).

the display shows:



where: xx = ON or OFF

zz = total pre-brewing ON time

yyyyy = espresso, 2 espressos, coffee or 2 coffees

Values from 0.1 to 5 in steps of 0.1 sec.

If you want to modify the parameter you must press the buttons **K1GR1 (+)** or **K2GR1 (-)** to increase or decrease the value.

After having completed programming of the pre-brewing times, press the button **K5GR1 (MENU)** to proceed to display the setting of the sensitivity level:

the display shows:



where xxx may be:

sensitivity low 150kΩ (low)


sensitivity mid 400kΩ (medium)

sensitivity high 1MΩ (high)

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having completed the setting, pressing the button **K5GR1 (MENU)** allows you to move on to the display for choosing the function of setting the number of cycles that can be performed (allowed distributions).

the display shows:



where xxx may be a number from 0000 to 99000 in steps of 1000

when xxx is 0000 the function is disabled.

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having completed the setting, pressing the button **K5GR1 (MENU)** allows you to move on to the display for choosing the possibility of showing the temperature in degrees Celsius or Fahrenheit.

the display shows:



where °X may be "°C" or "°F"

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having completed the setting, pressing the button **K5GR1 (MENU)** allows you to move on to the display for setting the boiler setpoint temperature T°SET.

the display shows:



where xxx is a selectable value from 80 to 125°C in steps of 1°C.

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having completed the setting, pressing the button **K5GR1 (MENU)** allows you to move on to the display of the parameters for PID type thermostat control:

the display shows:



where xx.x is the proportional correction constant


where y.yy is the integrative correction constant

where zz.z is the derivative correction constant

each value may be selected from 0.1 to 99.9°C in steps of 0.1

The default regulation is PID with the following parameters:

the display shows:



while to enable regulation with hysteresis of 2°C it is necessary to set all k at value 0

the display shows:




If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having completed the setting, pressing the button **K5GR1 (MENU)** allows you to move on to the display for setting the range of regulation of the PID with respect to the setpoint temperature.

Outside this range the regulation is always on/off.

the display shows:



where x is the value of the range in degrees and this value may be selected from 2 to 5°C in steps of 1°C

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having completed the setting, pressing the button **K5GR1 (MENU)** allows you to move on to the display for setting the time-out for filling the water level in the boiler:

the display shows:



Selectable value: from 10 to 250' in steps of 1 minute

If you want to modify the parameter, press the buttons **K1GR1 (+)** or **K2GR1 (-)**.

After having programmed the time-out, press **K5GR1 (MENU)** to move on to the next menu; this takes you to the setting of the litres of the water-softener filter.

the display shows:



where xxxxx is a selectable value from 0 to 5000 in steps of 1 litre.

If you want to modify the "water filter" parameter for the litres counted you must press the buttons **K1GR1 (+)** or **K2GR1 (-)** to increase or decrease the value.

Pressing the button **K5GR1 (MENU)** again takes you out of the TECHNICAL LEVEL Programming phase.

the display shows:




Note: once you have entered the TECHNICAL LEVEL Programming environment, to leave it you must scroll through all the menus by pressing the button K5GR1 (MENU) until it returns to OFF status.

ALARM SIGNAL

TIME OUT LEVEL IN BOILER (FILLING)

When this indication appears on the display:






it means that the time for filling the water level in the boiler has been exceeded.

In fact, whenever the level probe detects the lack of water (probe uncovered) the filling phase is enabled (EVLIV + PUMP).

If EVLIV + PUMP remain energised continuously for a time longer than the time-out set in the TECHNICAL LEVEL Programming, all the principal functions of the doser are inhibited. The keyboards are disabled and the operation of all actuators is inhibited.

All the leds on the keyboards start to flash (½ ON, ½ OFF) to give a visual warning that the system is entering alarm status.

To leave the alarm warning status it is necessary to switch the doser off and on again.



BOILER TEMPERATURE

PROBE SHORT CIRCUITING / EXCESS TEMPERATURE

In the case of a short circuited boiler temperature prone or in the case of a temperature higher than a determined value for 5 consecutive


seconds, an alarm warning is given by making all the LEDs flash.

The alarm threshold is **140°C**.

The heating and the buttons of the boiler in alarm status are disabled. The distribution in progress is not aborted.


The following appears on the flashing display:

the display shows:




The alarm disappears when the temperature returns within acceptable values.


The warning is removed by switching OFF the machine.



THE LEDS ARE FLASHING



THE LEDS ARE FLASHING



THE LEDS ARE FLASHING

BOILER PROBE UNCONNECTED / INTERRUPTED

If the boiler temperature probe is unconnected or interrupted or if it determines a temperature around 0°C, within 5 seconds an alarm indication is given by making all the LEDs on the keyboards flash.

The heating and the buttons of the boiler in alarm status are disabled. The distribution in progress is not aborted.


The following appears on the flashing display:

the display shows:




The alarm disappears when the temperature returns within acceptable values.


The warning is removed by switching OFF the machine.



THE LEDS ARE FLASHING




THE LEDS ARE FLASHING



THE LEDS ARE FLASHING

ABSENCE OF IMPULSES OF THE FLOW METER (5 SECONDS)

When this indication appears on the display:




it means that the impulses are not arriving from the flow meter for the group activated (x).

In fact, after having started each volumetric dose (EVx + PUMP in both the distribution and programming phase), the doser checks the correct operation of the flow meter by measuring the impulses that is sends to the microcontroller.

If not impulses are detected for a period of more than 5 consecutive seconds, the led for the selected dose starts to flash (½ ON ½ OFF).


After 1 minute (flow meter time-out) of continued absence of impulses from the flow meter, the dose in progress is automatically stopped.



THE LED IS FLASHING

FILTER ALARM AND RESET


This function allows you to reset the distribution count. When this indication appears on the display:



where xxx is the telephone number set as a suggestion

... it means that the filter has exceeded the number of litres that it can purify, as set in the TECHNICAL LEVEL Programming.

To reset this signal it is sufficient to supply power to the doser by holding down the buttons K3GR1 and K4GR1 simultaneously.



Pressing buttons to switch on the system

the display shows:



MAINTENANCE ALARM AND RESET


When this indication appears on the display:



where xxx is the telephone number set as a suggestion, it means that the number of cycles that can be performed (coffees distributed) as set in the **TECHNICAL LEVEL Programming** has been exceeded

To reset this signal it is sufficient to supply power to the doser by holding down the buttons K1GR1 and K2GR1 simultaneously.

the display shows:




Pressing buttons to switch on the system

RESET TOTAL SINGLE DOSES

It is possible to reset the count of the consumption of single doses.


To reset this signal you have to go to TECHNICAL LEVEL Programming, to the Total Reading menu, and hold down the buttons K3GR1 and K4GR1 simultaneously for 3 seconds.

the display shows:



Pressing buttons for 3 seconds

the display shows:



ATTENTION: the total derived from the sum of all the distributions made for each button of each group cannot be reset.

Note: the consumption reset operation DOES NOT RESET the reading of the litres consumed; to reset this, refer to the specific paragraph.

PRESET DEFAULT DATA

The factory presetting allows you to delete the data memory completely and load standard values for all the memorised data.

This must be carried out, for example, after the programming of the microprocessor (on board software OBP) if that has also reset its EEPROM memory, or when a software update has affected one or more stored data or added new ones.


So when switching on, hold down the buttons **K1GR1 + K3GR1 + K5GR1** simultaneously.

When preset is completed, the following appears on the display:

the display shows:



Hold down simultaneously when switching on



Only group 1 keyboard

To return to normal operation you must switch off and on again.

After a factory preset it is necessary to recheck and if necessary reset all the machine parameters (bar/technician/factory/roaster), including the respective passwords (except the factory password which is fixed). The factory preset also resets all the counters, including the total doses made.

PROCEDURES IN THE EVENT OF A POWER CUT

In the event of an interruption in the power supply, when power returns the doser resumes the status (IDLE-ON or OFF) that it was in at the time of the power cut.

Any distributions in progress are aborted.

All dosing data are memorised.

PROGRAMMING THE PIDBULL CONTROL UNIT (ROMA TCS SED)

VERSION WITH 1 KEYBOARD


SWITCHING ON (VERSION WITH 1 KEYBOARD)

When the PIDBULL temperature control is fed by means of the external main switch, it resumes the "OFF" or "IDLE-ON" status that it presented before being disconnected from the mains (see "Procedures in the event of a power cut").


At the time of switching on, the display of the 1st group briefly shows the version of the software installed (x.yy).

GROUP IDENTIFICATION (DECIMAL POINT, VERSION WITH 1 KEYBOARD)


To identify the information for each group, the decimal point at bottom right of the display is lit SEQUENTIALLY and continuously, as shown in the drawings below:

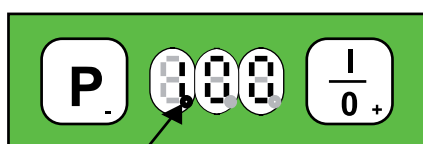

THE LIT POINT IDENTIFIES THE 1ST GROUP

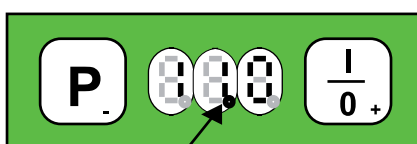

THE LIT POINT IDENTIFIES THE 2ND GROUP

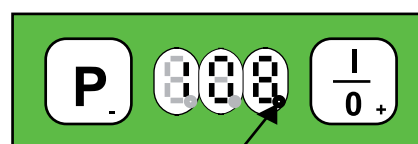

THE LIT POINT IDENTIFIES THE 3RD GROUP

OFF STATUS (VERSION WITH 1 KEYBOARD)

With the control off (but the system fed) all the outputs are deactivated and all the functions are disabled.



The decimal point always runs from one display to the other.

IDLE ON STATUS (VERSION WITH 1 KEYBOARD)

When the button K+/ONOFF is pressed the PIDBULL control is switched on which thus activates all the heating devices simultaneously.



The control immediately checks the temperature of each boiler through the respective temperature probe NTCx and, according to the set temperature T°SET, commands the triac RESx if there is any need to heat one of the groups with type PID thermoregulation (see paragraph). In IDLE-ON condition, the programmed temperature will always be shown on the display, the default value is 100°C.

SWITCHING OFF ALL THE GROUPS (VERSION WITH 1 KEYBOARD)

To switch off the control on all groups SIMULTANEOUSLY, just hold down the button K+/ONFF.GR1 for 3 seconds.




PROGRAMMING T°SET (VERSION WITH 1 KEYBOARD)

The desired temperature may be programmed with this procedure:

Press the button K-/PROG.GR1 several times to choose the temperature to be modified, the display shows in sequence:

- t1 group 1 boiler temperature
- t2 group 2 boiler temperature
- t3 group 3 boiler temperature




For example, if you want to modify the temperature "t2", just press the button K+/ONOFF.GR1 to confirm and then, using the buttons K+/ON/OFF and K-/PROG, it is possible to modify the temperature value (within 5 seconds, otherwise you leave the programming phase).

The temperature may be set between 80°C and 130°C.

SWITCHING OFF A SINGLE GROUP

If it is not being used, and to avoid any alarms, it is possible to switch off the desired group individually by means of the programming phase, bringing the temperature one step below the minimum limit with the button **K-/PROG.GR1** until the word **OFF** appears.

During normal operation the word **OFF** will appear on the display with the decimal point for the group that is switched off.

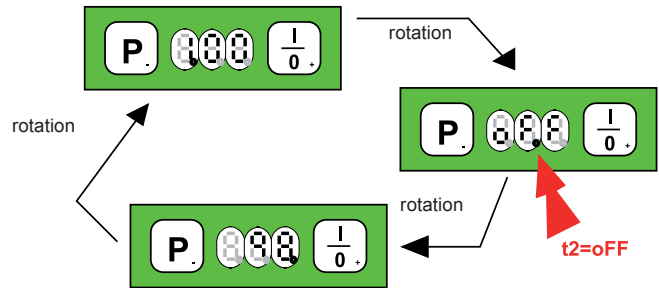


PID THERMOREGULATION

The thermoregulation of temperatures is achieved by commanding the

Triac according to a proportional, integrative and derivative algorithm, which is the same for all 3 groups (see TECHNICAL LEVEL Programming for the parameter setting); this is done 10°C before reaching the set temperature.

Before the 10°C proportional band, the command given to the Triac is of the full-mode type.

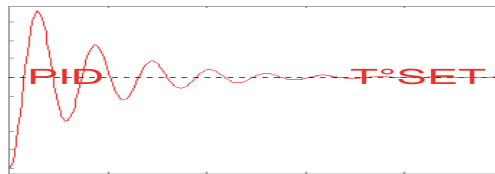

The temperature regulation is carried out following an algorithm that uses three constants:

- proportional: P.
- integrative: i.
- derivative: d.

The three constants must be adapted to every type of coffee machine according to the power characteristics of the resistance, the dimensions of the boiler, its heat loss, etc.

The “setpoint value or T°SET” is the boiler temperature that must be maintained.

- If the temperature swings excessively around the T°SET in the heating or holding phase, with peaks of value that do not diminish over time, it is necessary to decrease the proportional constant: P.
- If the temperature swings excessively around the T°SET in the holding phase, with a very long period of oscillation and with peaks of value that do not diminish over time, it is necessary to decrease the proportional integrative constant: i.
- If the temperature has an excessive oscillation and is often larger than the T°SET during the heating or holding phase, but it attenuates as time passes, it is necessary to decrease the derivative constant: d.
- If the temperature tends to be below the T°SET value during the heating phase, getting farther away from it, it is necessary to increase the derivative constant: d.
- If the temperature tends to be constantly below the T°SET value during the heating phase, it is necessary to increase the proportional constant “d” and also slightly increase the integrative constant “i”.
- If the temperature tends to be constantly below or above the T°SET value during the holding phase, it is necessary to increase the integrative constant “i” and also slightly increase the proportional constant “P”.

TEMPERATURE OFFSET

This function allows you to set a temperature offset by means of which it is possible to view on the display the temperature of the water coming down from the group with respect to the temperature measured by the probe **NTCx** (usually situated in the boiler), which will certainly not have the same value due to physical heat loss.

The offset value must be calculated by actually measuring the temperature of the water coming down from the group with respect to that shown on the display at the same moment.

This measurement is to be done by the customer as it varies according to the type of coffee machine and must be carried out first of all with the offset value set at 0°C.

This function can be better illustrated with an example:

if the TSET = 100°C

with OFFSET = 0°C thermostat control temp. = T°SET + OFFSET = **100°C** on display = **100°C**

with OFFSET = 10°C thermostat control temp. = T°SET + OFFSET = **110°C** on display = **100°C**

Note the difference in the thermostat control temperature but not in the temperature on the display.

The temperature offset is set by default at 10°C.


TECHNICAL LEVEL PROGRAMMING

Using the TECHNICAL LEVEL Programming it is possible to set:

- the heating groups parameter on the display **F.01**
- the number of keyboards used parameter on the display **F.02**
- the temperature display in degrees Celsius or Fahrenheit parameter on the display **F.03**

- the value of the proportional constant parameter on the display **P**.
- the value of the integrative constant parameter on the display **i**.
- the value of the derivative constant parameter on the display **d**.
- the value of the offset for group 1 parameter on the display **F.04**
- the value of the offset for group 2 parameter on the display **F.05**
- the value of the offset for group 3 parameter on the display **F.06**

To enter this phase you must supply power to the system by holding down simultaneously the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** on the **keyboard of the 1st group**.



In this programming operation the button **K-/PROG.GR1** scrolls through the menus, while the button **K+/ON/OFF.GR1** confirms entry to a menu, and within the menu both buttons allow you to increase or decrease the parameter.

The parameter is memorised automatically, you just have to wait 2 seconds.

When the display that is showing the modified or non modified parameter shows the parameter again, for example F.0x , it means that it has been memorised.

F.01 = NUMBER OF HEATING GROUPS

On entering the programming phase, the display of the keyboard of the 1st group immediately shows the first parameter that can be modified which is the number of usable groups, which may be 1, 2 or 3.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be 3 or 2 or 1. If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

F.02 = NUMBER OF KEYBOARDS

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to set the number of keyboards that can be used.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be 3 or 1 (2 is not possible).

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

F.03 = DEGREES CELSIUS OR DEGREES FAHRENHEIT

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to set the display in degrees Celsius or Fahrenheit.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be °C or °F .

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

P: = PROPORTIONAL CONSTANT OF PID THERMOREGULATION

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to set the value of the proportional constant of PID thermoregulation.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be varied from 0.1 to 99.9 in steps of 0.1.

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

i. = INTEGRATIVE CONSTANT OF PID THERMOREGULATION

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to set the value of the integrative constant of PID thermoregulation.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be varied from 0.1 to 99.9 in steps of 0.1.

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

d: = DERIVATIVE CONSTANT OF PID THERMOREGULATION

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to set the value of the derivative constant of **PID** thermoregulation.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be varied from 0.1 to 99.9 in steps of 0.1.

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 3 seconds for it to be automatically memorised.**

F.04 = GROUP 1 OFFSET

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to change the temperature offset for group 1.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be varied from 1 to 30°C in steps of 1°C.

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

F.05 = GROUP 2 OFFSET

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to change the temperature offset for group 2.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be varied from 1 to 30°C in steps of 1°C.

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

F.06 = GROUP 3 OFFSET

Moving on to the next parameter with the button **K-/PROG.GR1**, it is possible to change the temperature offset for group 3.

When confirmation is given with **K+/ONOFF.GR1** the previously set value of the parameter is shown which may be varied from 1 to 30°C in steps of 1°C.

If you want to change it, use the buttons **K+/ONOFF.GR1** and **K-/PROG.GR1** **and wait 2 seconds for it to be automatically memorised.**

TO LEAVE THE TECHNICAL LEVEL PROGRAMMING PHASE YOU MUST SWITCH THE PIDBULL CONTROL OFF AND ON AGAIN.

ALARM SIGNAL

TEMPERATURE PROBE UNCONNECTED / INTERRUPTED

If the boiler temperature probe is unconnected or interrupted or if it determines a temperature around 0°C, within 5 seconds an alarm indication is given.

A1 boiler probe group 1

A3 boiler probe group 2

A5 boiler probe group 3

The heating and the button K-/PROG.GRx are disabled.

The alarm disappears when the temperature returns within acceptable values.

It is possible to switch off the control by pressing the button K+/ONOFF.GRx.

TEMPERATURE PROBE SHORT CIRCUITING / EXCESS TEMPERATURE

In the case of a short circuited boiler temperature probe or in the case of a temperature higher than a determined value for 5 consecutive seconds, an alarm warning is given.

A2 boiler probe group 1

A4 boiler probe group 2

A6 boiler probe group 3

The alarm threshold is **140°C**.

The heating and the button K-/PROG.GRx are disabled.

The alarm disappears when the temperature returns within acceptable values.

It is possible to switch off the control by pressing the button K+/ONOFF.GRx.

PRESET DEFAULT DATA

The factory presetting allows you to delete the data memory completely and load standard values for all the memorised data, even those that are not modified by the presetting.

This must be carried out, for example, after the programming of the microprocessor if that has also reset its EEPROM memory, or when a software update has affected one or more stored data or added new ones.

So when switching on press the button **K+/ON/OFF.GR1** and wait for the display to show the letters **PrS**; when preset is complete the following appears on the display:

when switching on



PRESET

To return to normal operation you must switch off and on again.

After a factory preset it is necessary to recheck and if necessary reset all the parameters of the PIDBULL control.

The preset does not change the configuration of the number of keyboards.

PROCEDURES IN THE EVENT OF A POWER CUT

In the event of an interruption in the power supply, when power returns the doser resumes the status (IDLE-ON or OFF) that it was in at the time of the power cut.

Any distributions in progress are aborted.

All dosing data are memorised.